


Solutions for stone working



CERATIZIT is a high-technology engineering group specialised in cutting tools and hard material solutions.

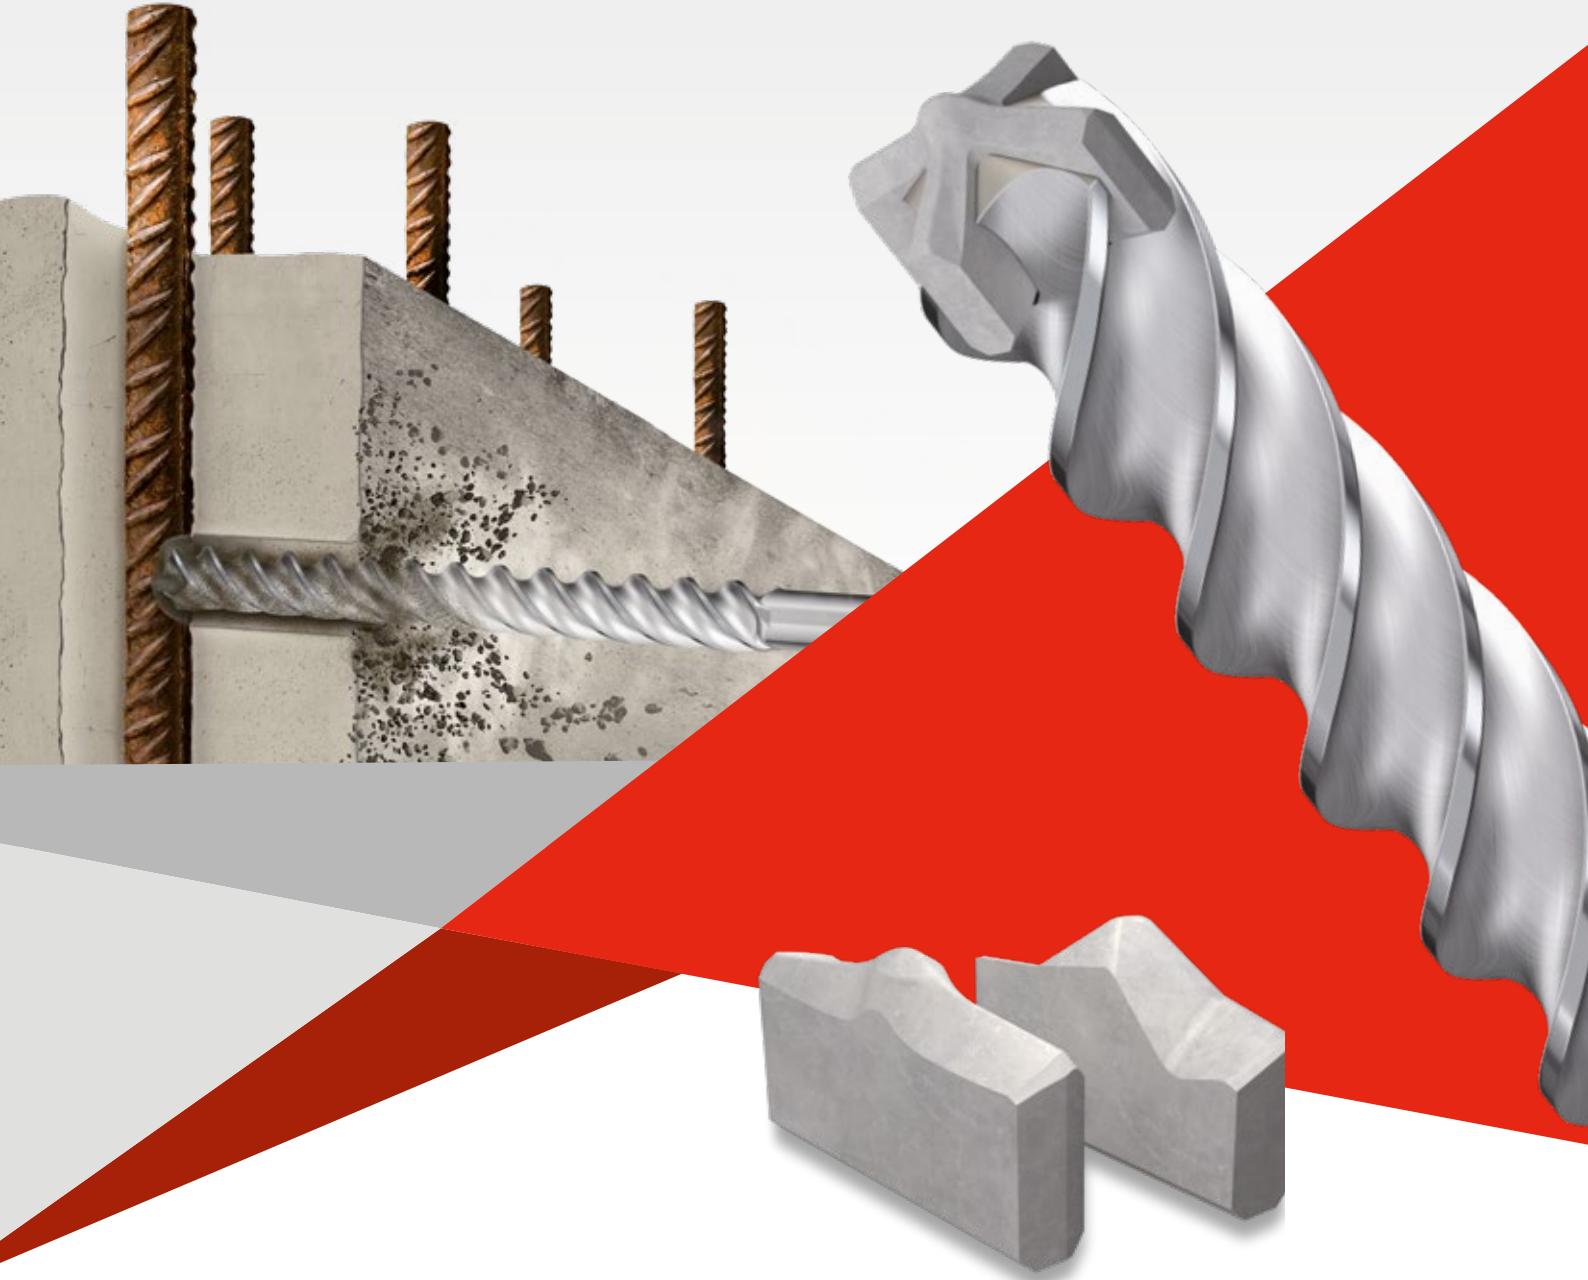

Because your needs are important to us, we work together with you to find the ideal solution for your application and requirements. **You can rest assured that with us you are not just a customer but a partner.**

Dear valued customer,

We would like to present you with our new catalogue for stone working products. It contains all the standard products manufactured by CERATIZIT.

CERATIZIT can offer you even more than our standard products range! Get a competitive head start, and benefit from decades of experience in the development of customised solutions for the machining of concrete, ferro-concrete, stone, masonry and other materials. Thanks to our engineering team, we offer everything tool manufacturers need. Innovation, new developments, high value and quality products and service are our core business.

Because your needs are important to us, we work together with you to find the ideal solution for your application and requirements. You can rest assured that with us you are not just a customer but a partner.

Yours,

the CERATIZIT team



Contents

▲ CERATIZIT Group	5
▲ Cemented carbide	6-10
Carbide production	7
Metal forming – pressing – machining	8
Sintering	9
Carbide properties	10
▲ Production site	11
▲ Grades for stone working	12-15
Cemented carbide: a smart composition	13-14
Composition and properties	15
▲ Innovation	16-19
Project management in collaboration with our customers	18-19
▲ Hammer drill tips	20-35
Grades	22
Applications	23
Hammer drill tips	24-35
▲ Masonry drill tips	36-57
Grades	38
Applications	39
CERATIZIT Style 58000	40
Masonry drill tips	41-57
▲ Special tips	58-63
Metal cutting tips	60-61
Glass drill tips	62-63
▲ Core drill tips	64-69
Grades	66
Core drill tips	67-69
▲ Hard Material Solutions	70
▲ Index	71

CERATIZIT Group

For over 100 years, CERATIZIT has been a pioneer in developing exceptional hard material solutions for machining and wear protection. The private company, with registered offices in Mamer, Luxembourg, develops and produces highly specialised cutting tools, indexable inserts, rods made from hard materials and wear parts.

The CERATIZIT Group is the global market leader in various application segments and successfully develops new carbide and cermet grades, such as for wood and stone working.

Facts & figures

Headquarters

Mamer, Luxembourg

 **30** more than production sites

 **more than 8 000 employees**

 **80** more than countries in which we are active

 **more than 100 000 products**

 **more than 1 000 patents & utility models**

 **more than 200 R&D employees**

 **35** % of products developed in the last 5 years

 **more than 20 innovation awards**

Cemented carbide

Cemented carbides are composite materials consisting of a hard material and a comparatively soft binder metal, like cobalt (Co). The performance characteristics of carbide are determined by hardness, transverse rupture strength and fracture toughness. With regard to their application, important parameters for the optimisation of these characteristics are the cobalt content and the grain size of the metal binder phase. The tungsten carbide grains have an average size of less than $0.2\mu\text{m}$ up to several micrometres (μm). The cobalt fills the gaps between the carbide grains. When extremely high toughness is required, the cobalt content can amount to as much as 30%, whereas, for maximum wear resistance, the cobalt content is reduced and the grain size decreased to the nanocrystalline range of $< 0.2 \mu\text{m}$.

CERATIZIT produces far more than 100 different cemented carbide grades particularly for wear parts and cutting tools, thus offering a customised solution for every application.



Carbide production

Carbide production at CERATIZIT started in 1929. Last but not least, thanks to long-standing experience CERATIZIT handles the entire process chain, from the raw material to the dispatching of the finished products to customers. The production process of powder-metallurgical products basically includes the four steps of powder preparation, shaping, sintering and finishing.

Tungsten carbide production

The ammonium para-tungstate (APT) is calcined into tungsten oxide under high temperature. Subsequently the oxide is reduced to tungsten metal in a hydrogen atmosphere. The metal powder is then mixed with carbon and carburised under inert atmosphere at high temperatures. The production parameters are decisive for the WC grain size in the sintered carbide.

Powder preparation

The tungsten carbide is intensely mixed with the binder metal cobalt, nickel or iron, various grain growth inhibitors and special alloys as well as materials, which promote compaction, by wet grinding so that a homogeneous suspension is created. Afterwards, the suspension is dried in a spray tower to produce a granulate with good flow characteristics. This granulate represents the basis for all forming processes.

APT (ammonium para-tungstate)



Yellow tungsten oxide



Blue tungsten oxide



Tungsten



Tungsten carbide



Metal forming – pressing – machining

Metal forming

The objective of the forming process is to obtain a near net shape sample. Pressing is normally carried out at room temperature with pressures reaching up to several tons per square centimetre.

There are several ways of pressing blanks:





During isostatic cold pressing the powder is filled into an elastic flexible hose and pressed into a compacted form through high liquid pressure. The powder blocks which are produced in this way can then be processed mechanically. All common machining methods like milling, cutting, drilling or turning may be applied.



In uniaxial pressing the pressing tool consists of a die and an upper and a lower punch. The carbide powder is filled into the die and then compacted to create the so called green carbide, which is ejected from the pressing die.



Extrusion pressing is mainly used to produce rectangular bar or cylindrical rod, with or without axial hole(s). A plasticiser is added to the powder. The resulting paste is pressed through an extrusion nozzle. Before sintering, the plasticiser must be evaporated in special drying furnaces.

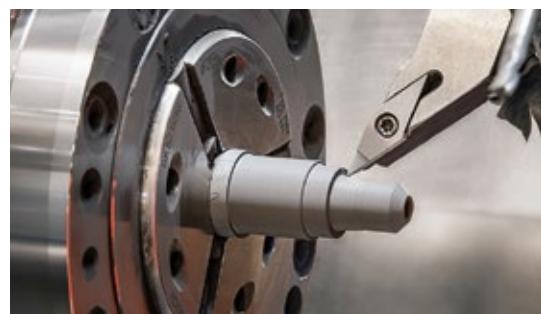


Metal Injection Moulding (MIM) is a process used to produce more complex forms which cannot be produced by direct pressing. The paste preparation is similar to the extrusion process.

Sintering


Sintering process



The sintering process converts the blank into a homogeneous and dense carbide with a high level of hardness. The material is sintered at temperatures between 1,300 and 1,500 °C (liquid phase sintering) and sometimes also at high pressure (up to 100 bar). The volume is reduced by up to 50% during this process.

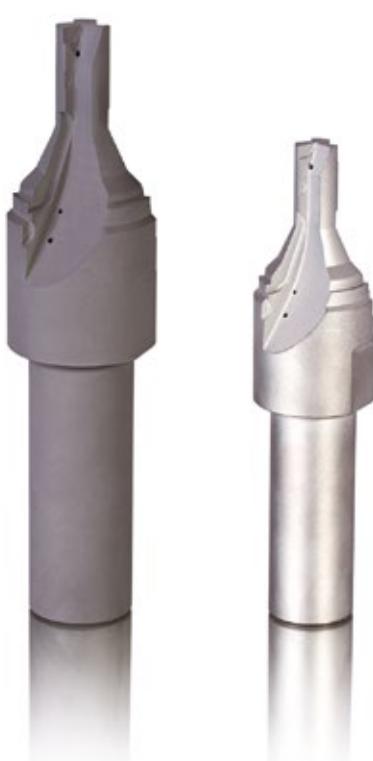

Carbide properties depending on the Co contents and WC grain size

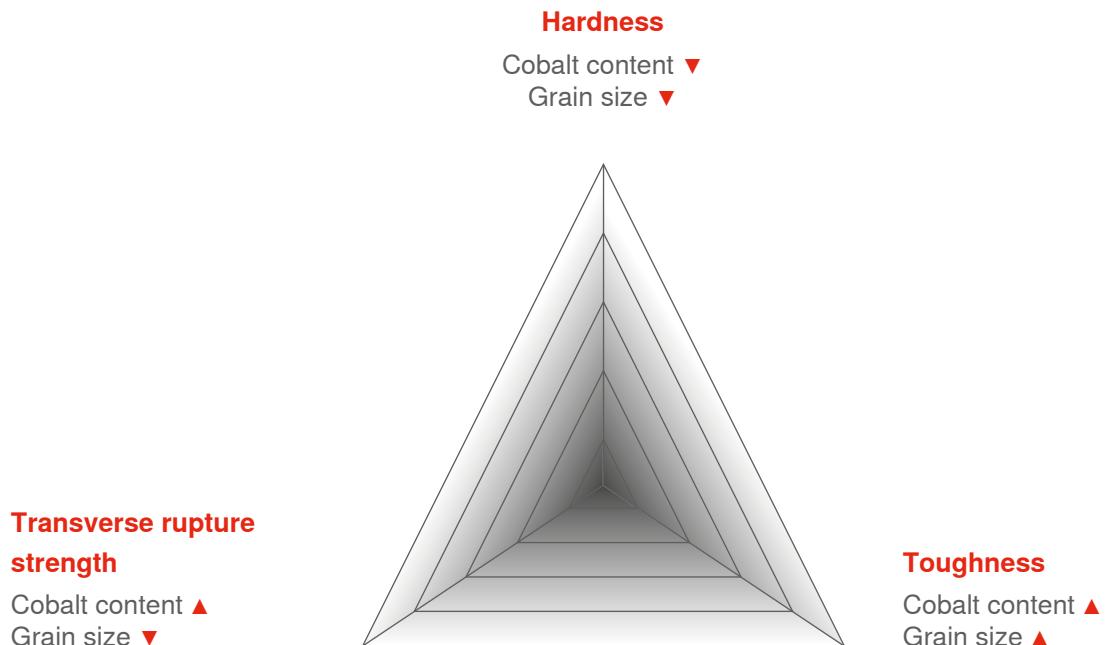

Hardness (wear resistance)

Nozzles for water jet cutting

Type of stress

- ▲ Wear
- ▲ Corrosion

Carbide grade

- ▲ Very high hardness: 2650 HV₃₀
- ▲ Small grain size: < 0.5 µm
- ▲ Low Co content: 0.4%
- ▲ Corrosion resistance when adding Cr₃C₂

Transverse rupture strength

Micro-drills

Type of stress

- ▲ Wear
- ▲ Deflection

Carbide grade

- ▲ T.R.S.: > 4000 MPa
- ▲ Small grain size: < 0.5 µm + VC
- ▲ Low Co content ~ 8.5%
- ▲ High wear resistance: 1930 HV₃₀

Toughness

Hot rolling

Type of stress

- ▲ Wear due to abrasion
- ▲ Built-up edge
- ▲ Impact stress

Carbide grade


- ▲ Sufficient fracture toughness: Co content 20%
- ▲ Good wear resistance: 1030 HV₃₀
- ▲ Medium grain size coarse or extra-coarse

Production site



Mamer, Luxembourg

The CERATIZIT Group has its headquarters in Mamer, Luxembourg. Today the plant in Mamer has more than 1,300 employees and concentrates on industrial wear protection, wood, metal and stone working as well as inserts and tools.

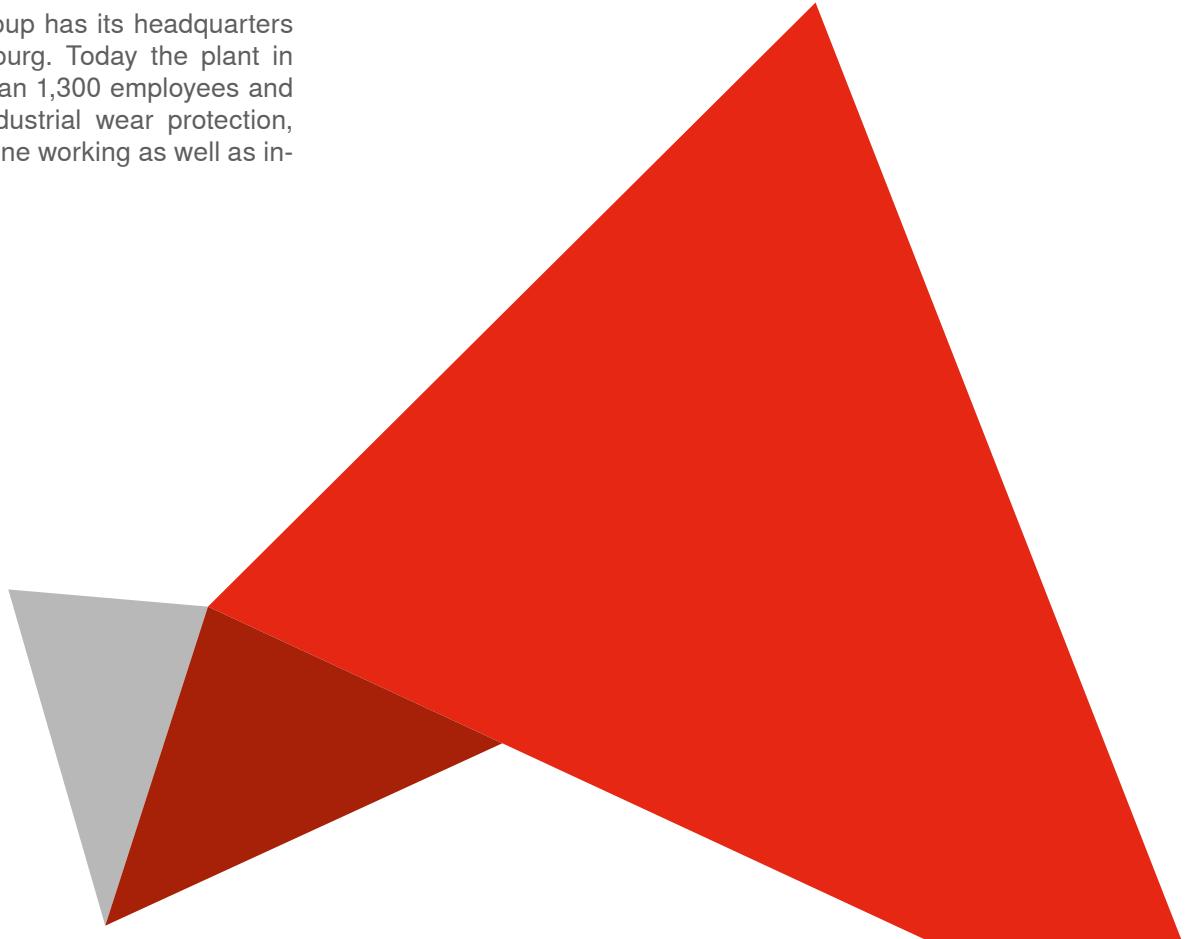

Grades for stone working

Sorten für Steinbearbeitung

Nuances pour les applications de la pierre

Gradi applicazioni pietra

Calidades para piedra





Carbide is a hard material with mechanical properties that can be adjusted within a very wide range, given its composition and microstructure. The hardness and toughness range of the CERATIZIT grades includes everything from wear-resistant tool steel to super-hard materials.

Cemented carbide: a smart composition

When starting production, the powder is prepared with a **composition that varies depending on the application**. Each powder mix consists of two phases: a hard material and a binder phase. The hard material provides hardness, i.e. wear resistance, while the metal binder ensures toughness.


Both the grain size and the binder content may be varied to meet specific needs, resulting in **numerous application possibilities**. In metal forming tool construction, cemented carbide consisting of tungsten carbide (WC) and cobalt (Co) is primarily used. The graphic on the left shows this in the form of a microscope image.

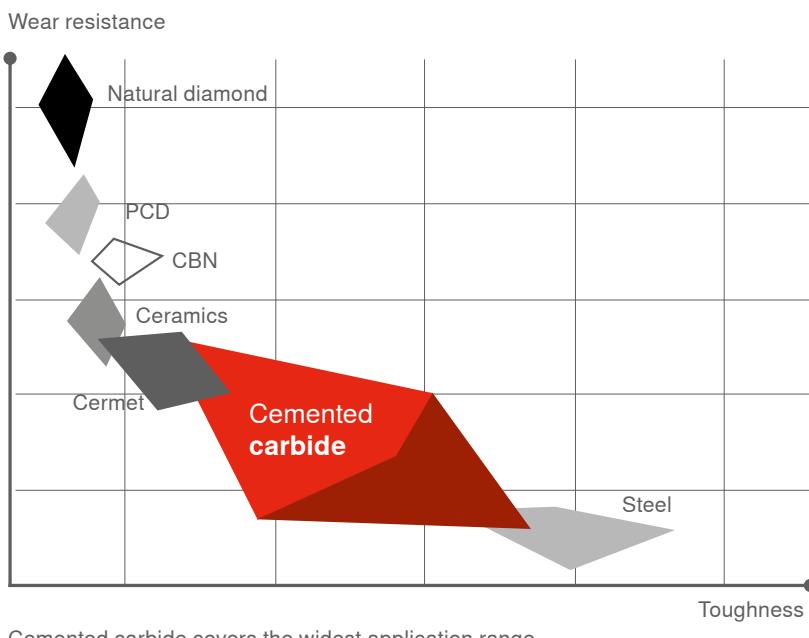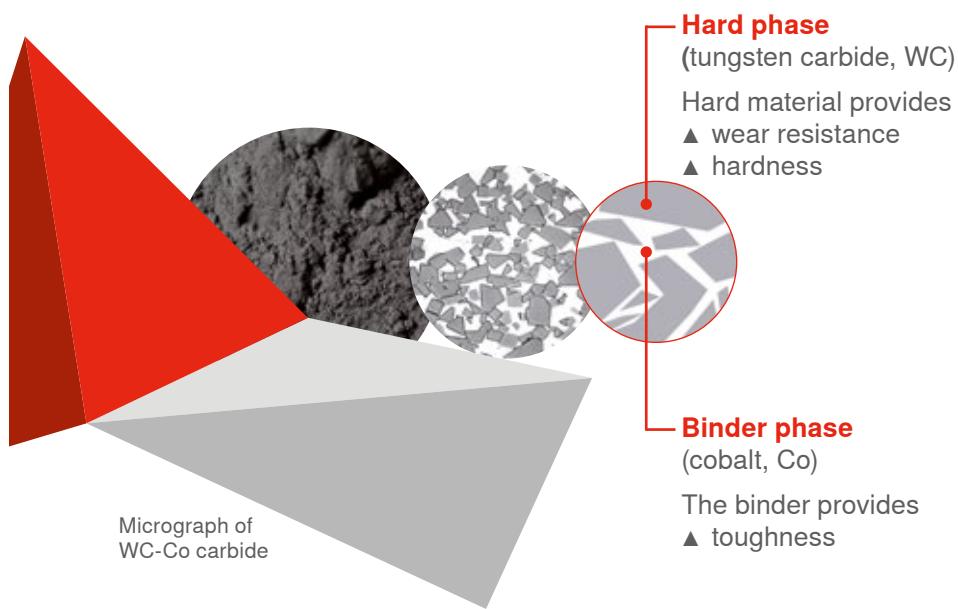



Cemented carbide covers the widest application range.

+	Criteria relevant for application
	<ul style="list-style-type: none"> ▲ Wear resistance, hardness ▲ Compressive strength ▲ Impact strength ▲ Transverse rupture strength ▲ Tribological properties ▲ Specific weight ▲ Magnetic properties ▲ Modulus of elasticity, rigidity ▲ Thermal properties ▲ Corrosion resistance, resistance to oxidation ▲ Toughness



The graphic illustrations below show that the mechanical properties of the carbide mainly depend on the binder content (Co) and the TC grain size. Hardness, i.e. wear resistance, increases inversely proportional to the fracture toughness. This means that the harder the material the more it reacts to notch tensions and impact stress (the ‘impact resistance’ parameter, which cannot be precisely defined, correlates with the fracture toughness of the material). On the other hand, the transverse rupture strength does not directly depend on the hardness but rather on the TC grain size and the cobalt content. The adhesive wear (tendency to stick), however, decreases with the grain size and the cobalt content of the carbide used. The list of the mentioned interdependencies, which could be extended at will for other wear and failure mechanisms, show that it is only possible to choose the correct carbide grade following a systematic procedure and/or based on experience with similar applications.

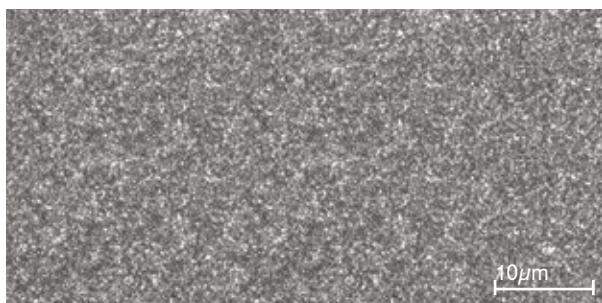



Ultrafine grain

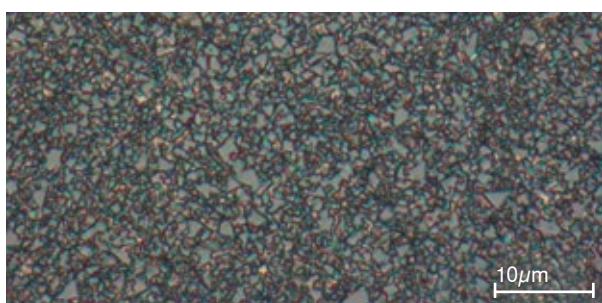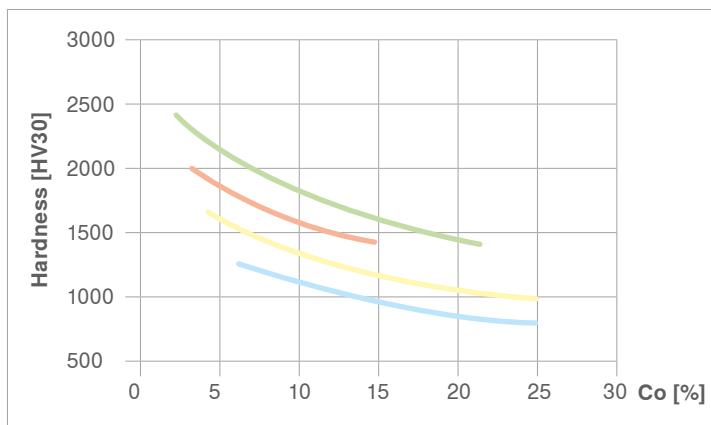

Submicron grain

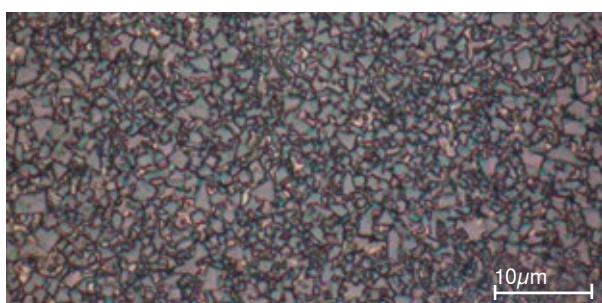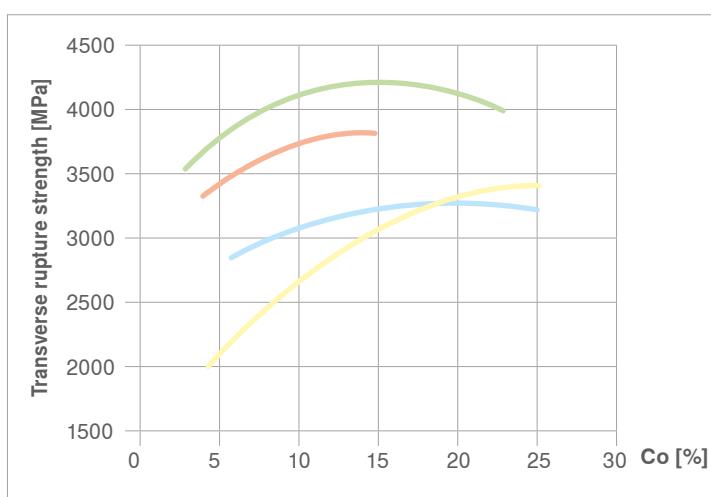

Fine / medium grain

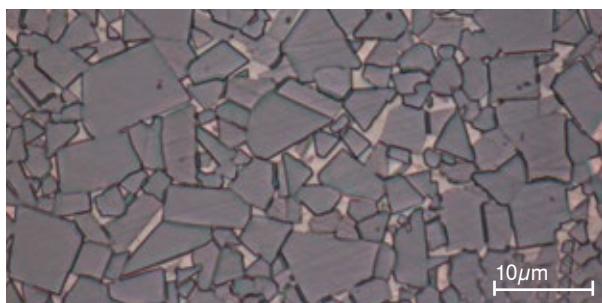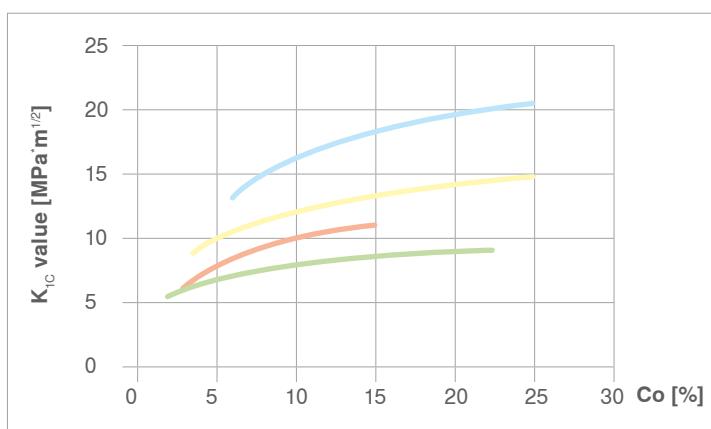

Coarse grain

█ Ultrafine grain █ Fine / medium grain
█ Submicron grain █ Coarse grain

Composition and properties

Chromium grade

CERATIZIT grade code	ISO code	U.S. code	Binder [m %]	Density [g/cm ³]	Hardness			Transverse Rupture Strength	
					HV10	HV30	HRA	[MPa]	[P.S.I.]
CTS06-KC	KCR06	–	3.0	15.30	1950	1910	93.6	2300	334.000

WC-Cobalt – most popular grades

CERATIZIT grade code	ISO code	U.S. code	Binder [m %]	Density [g/cm ³]	Hardness			Transverse Rupture Strength	
					HV10	HV30	HRA	[MPa]	[P.S.I.]
CTF12-BC	BC05	C2	6.0	14.95	1640	1620	92.1	2200	319.000
CTM17-BC	HC30/BC20	C1	8.5	14.65	1420	1400	90.4	2800	406.000
CTE20-BC	BC45	–	10.0	14.60	1130	1120	87.6	2600	377.000

Classification of the WC grain size

Average grain size [µm]	Classification	CERATIZIT code
< 0.2	nano	N
0.2 – < 0.5	ultrafine	U
0.5 – < 0.8	submicron	S
0.8 – < 1.3	fine	F
1.3 – < 2.5	medium	M
2.5 – < 6.0	coarse	C
> 6.0	extra-coarse	E

Innovation


Innovation

Innovation

Innovazione

Innovación



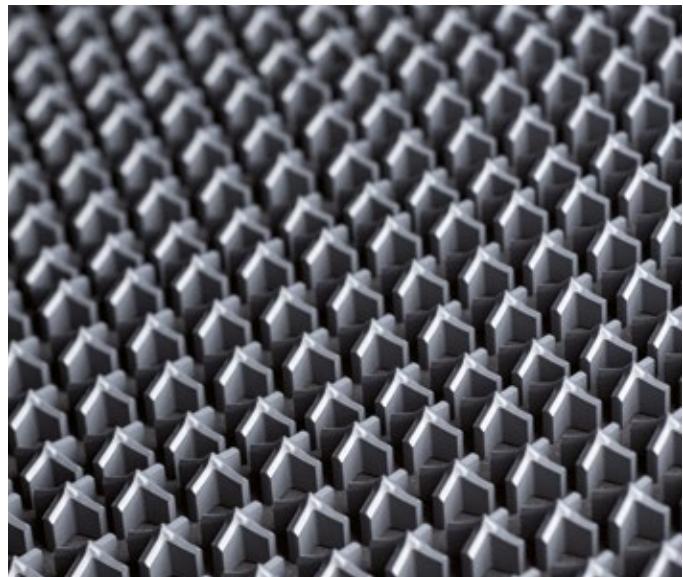

Project management in collaboration with our customers

Welcome on board!

The CERATIZIT team is happy to invite you to join us on an innovative journey!

Let us guide you through all the project steps leading to your success. Thanks to our engineering expertise, we can take your ideas and concepts through to the desired destination – your customers. We will travel together through the different steps of this trip, from feasibility study to prototypes and finally to serial production.

Our target is to guide you all along the way in developing new products or improving existing ones. We will take care of your project thanks to our supreme carbide experience, ground production experts and our engineering team. So on each step of the way you will be provided with innovative carbide solutions tailored to your own manufactured tools.

Let's go!




Meeting between the customer and CERATIZIT




Feasibility study



Prototype

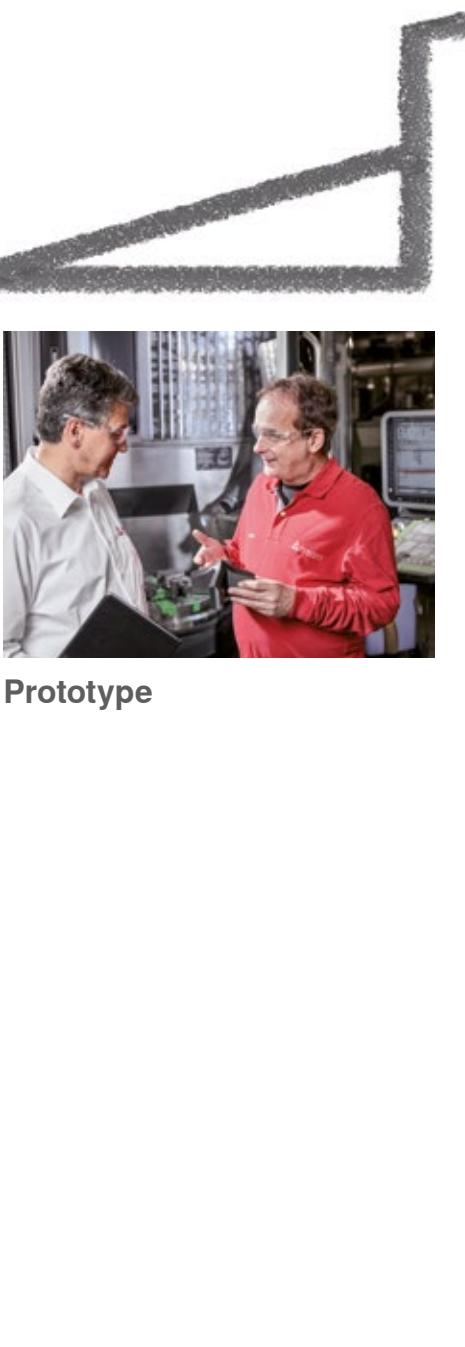

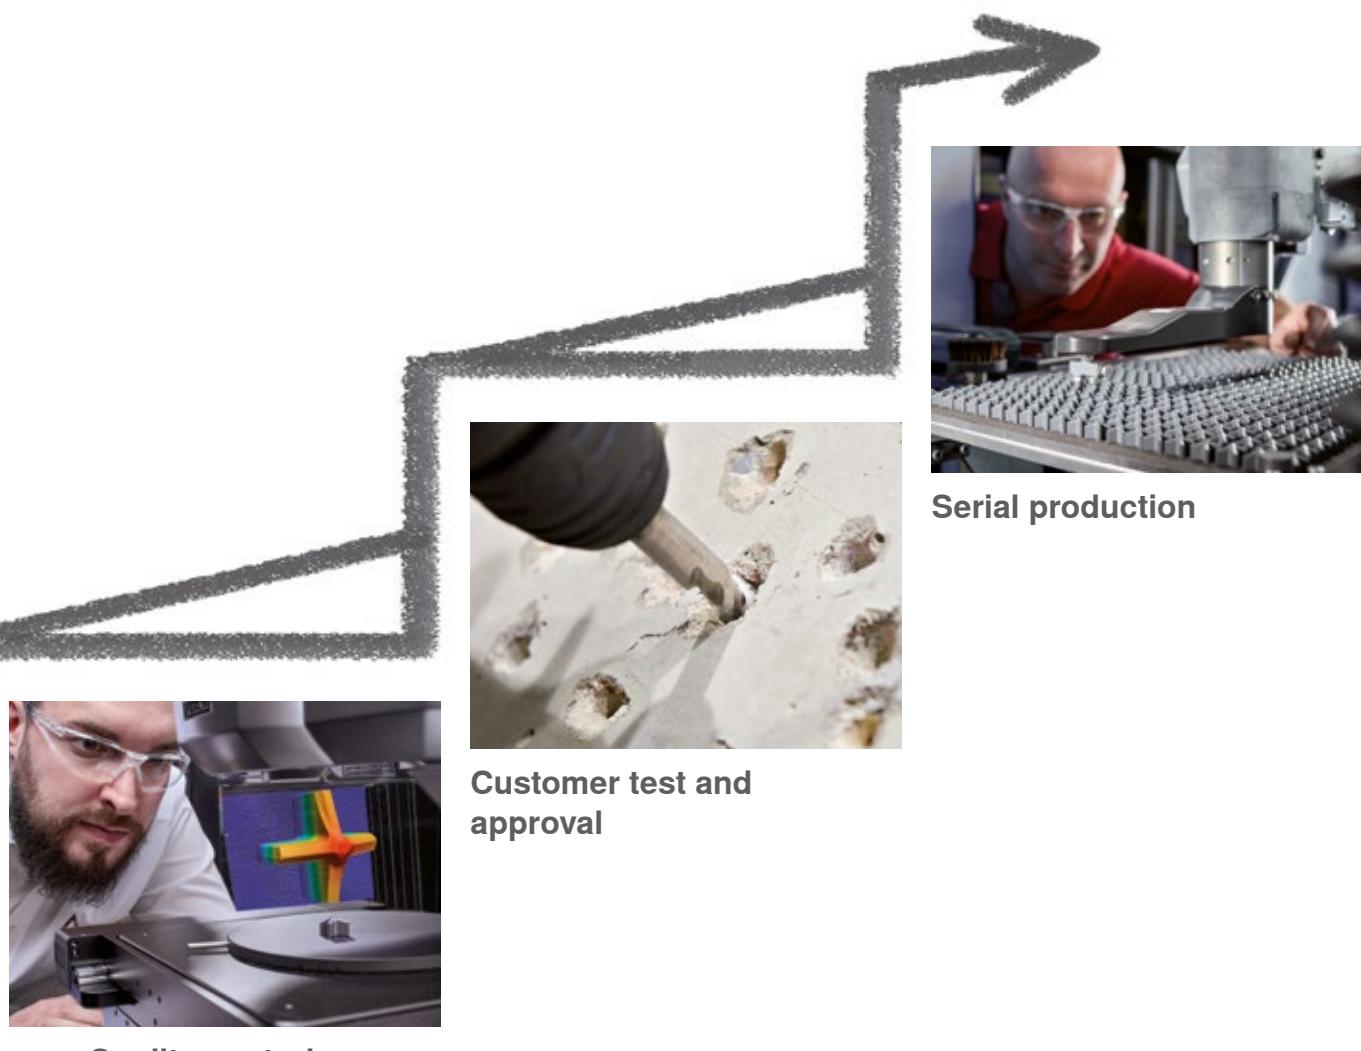

**A step ahead
for your success**


Hammer drill tips

Hammerbohrerplatten

Plaquettes pour mèche marteau

Placchette per punte a percussione

Puntas de brocas para percusion

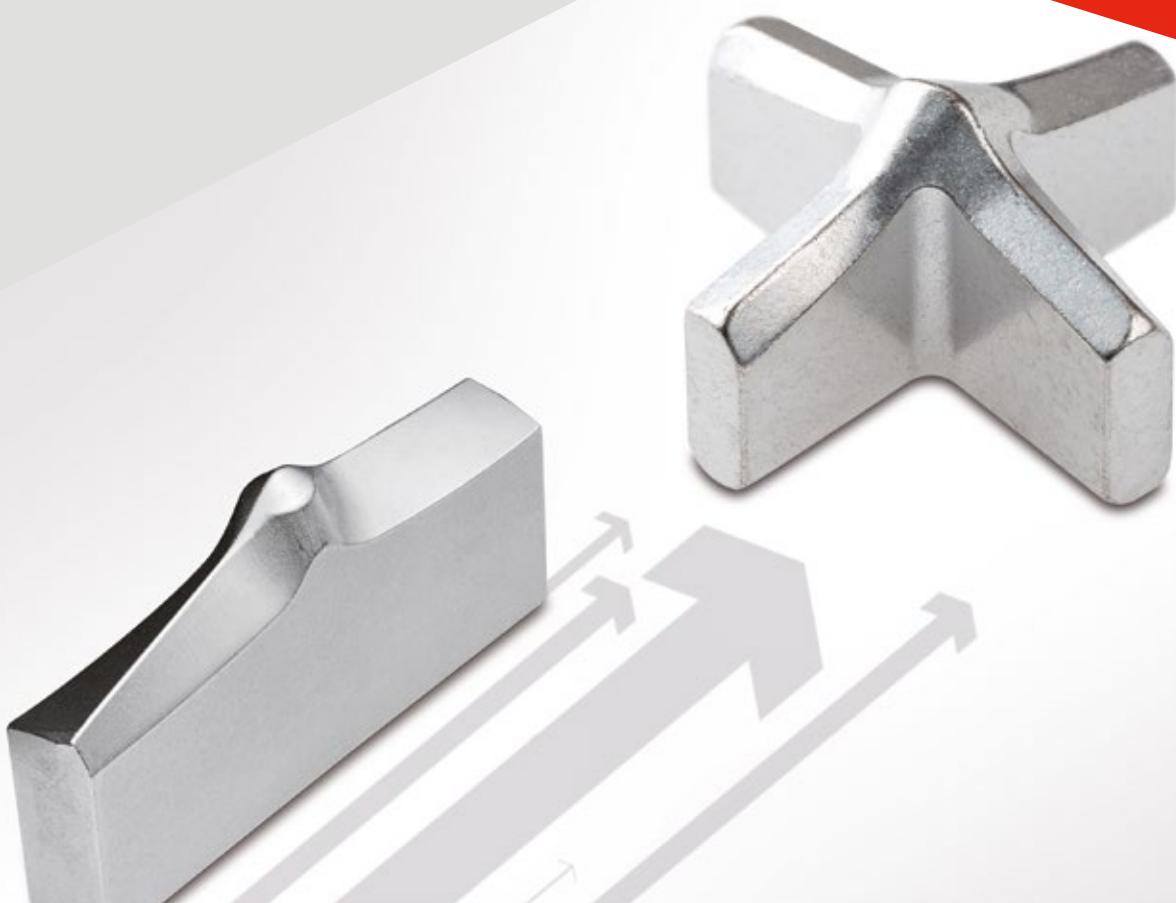

Index

Grades	Page
Composition and properties	22
Applications	23

Premium Hammer Drill Tips	Style	Range Ø	Specificity	PGM Conformity	Page
CT4	Metric (Ø mm)	5 – 35			24
CT4	ANSI (Ø inch)	1/2" – 1 3/8"			25
CT4	JAPAN (Ø mm)	6.4 – 16.5			25
46000	Metric (Ø mm)	4 – 52		✓	26
46600	ANSI (Ø inch)	1/8" – 2"			27
47500	JAPAN (Ø mm)	3.4 – 22			28

Standard Hammer Drill Tips	Style	Range Ø	Specificity	PGM Conformity	Page
50850	Metric (Ø mm)	4 – 20		✓	29
50850	ANSI (Ø inch)	5/32" – 5/16"			29
11384	Metric (Ø mm)	4 – 52	130°	✓	30
17871	ANSI (Ø inch)	1/8" – 2"	130°		31–32
26000	JAPAN (Ø mm)	4 – 22	130°		33

Special Hammer Drill Tips	Style	Range Ø	Specificity	PGM Conformity	Page
14444	METRIC (Ø mm)	4 – 8/	130°		34
38500	METRIC (Ø mm)	3 – 4.5	130°		34
38911	METRIC (Ø mm)	4 – 6	130°		34
39742	METRIC (Ø mm)	3.5	130°		35
40429	METRIC (Ø mm)	3.5	130°		35

Grades for stone working – composition and properties

Most popular grades HAMMER

HAMMER	CERATIZIT grade code	ISO code	Grain	%Co	HV10	TRS
Small Diameter	CTM17-BC	BC20	M	8.5	1420	2900
Large Diameter	CTM17-BC	BC20	M	8.5	1420	2800

Most popular grades MASONARY

CERATIZIT grade code	ISO code	Grain	%Co	HV10	TRS
CTF12-BC	BC05	F	6.0	1640	2200

Classification of the WC grain size

Average grain size [µm]	Classification	CERATIZIT code
< 0.2	nano	N
0.2 – < 0.5	ultrafine	U
0.5 – < 0.8	submicron	S
0.8 – < 1.3	fine	F
1.3 – < 2.5	medium	M
2.5 – < 6.0	coarse	C
> 6.0	extra-coarse	E

Applications




Type, description	METRIC	ANSI	JAPAN	PGM	Rebar	Concrete	Stone & Rock	Bricks	Blocks	Granit & Marble
CT4	✓	✓	✓			●	●	●	●	●
46000	✓			✓	●	●	●	●	●	
46600		✓			●	●	●	●	●	
47500			✓		●	●	●	●	●	
50850	✓			✓	●	●	●	●	●	
50850		✓			●	●	●	●	●	
11384	✓			✓	●	●	●	●	●	●
17871		✓			●	●	●	●	●	●
26000			✓		●	●	●	●	●	●
14444	✓				●	●	●	●	●	●
38500	✓				●	●	●	●	●	●
38911	✓				●	●	●	●	●	●
39742	✓				●	●	●	●	●	●
40429	✓				●	●	●	●	●	●

● Optimum
○ Not optimum

Hammer drill tips – METRIC

CT4


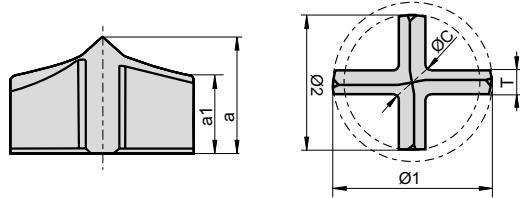


\varnothing [mm]	Height a [mm]	Height Tol. [mm]	Height a1 [mm]	$\varnothing 1$ [mm]	$\varnothing 1$ Tol. [mm]	$\varnothing 2$ [mm]	$\varnothing 2$ Tol. [mm]	Cent. \varnothing [mm]	Thickness [mm]
5.00	4.100	± 0.10	2.980	5.285	± 0.075	5.085	± 0.075	1.590	0.950
5.50	4.550	± 0.10	3.270	5.785	± 0.075	5.585	± 0.075	1.590	0.950
6.00	4.850	± 0.10	3.530	6.285	± 0.075	6.085	± 0.075	1.960	1.150
6.50	5.200	± 0.10	3.820	6.725	± 0.075	6.525	± 0.075	1.960	1.150
7.00	5.550	± 0.10	4.090	7.285	± 0.075	7.085	± 0.075	1.960	1.150
8.00	5.650	± 0.15	3.940	8.285	± 0.075	8.085	± 0.075	2.610	1.550
10.00	7.050	± 0.15	4.850	10.300	± 0.090	10.000	± 0.090	2.890	1.750
12.00	8.500	± 0.15	5.820	12.340	± 0.090	12.040	± 0.090	3.250	1.950
14.00	9.900	± 0.15	6.770	14.355	± 0.105	14.055	± 0.105	3.500	2.125
16.00	9.650	± 0.15	6.070	16.355	± 0.105	16.055	± 0.105	4.090	2.425
18.00	11.400	± 0.25	6.950	18.355	± 0.105	17.955	± 0.105	4.800	2.925
20.00	12.550	± 0.25	7.670	20.430	± 0.120	20.030	± 0.120	4.800	2.925
22.00	12.700	± 0.25	7.330	22.380	± 0.120	21.980	± 0.120	5.640	3.400
23.00	13.100	± 0.25	7.600	23.380	± 0.120	22.880	± 0.120	5.640	3.400
24.00	13.800	± 0.25	7.920	24.380	± 0.120	23.880	± 0.120	5.640	3.400
25.00	14.300	± 0.25	8.280	25.380	± 0.120	24.880	± 0.120	5.640	3.400
26.00	14.750	± 0.25	8.600	26.380	± 0.120	25.880	± 0.120	5.640	3.400
28.00	15.950	± 0.25	9.230	28.380	± 0.120	27.880	± 0.120	6.510	3.900
30.00	17.000	± 0.25	9.870	30.380	± 0.120	29.880	± 0.120	6.510	3.900
32.00	18.150	± 0.25	10.510	32.520	± 0.150	31.770	± 0.150	7.380	4.400
35.00	19.350	± 0.25	11.460	35.520	± 0.150	34.770	± 0.150	7.380	4.400

Codification code example: CT4- 5.00 CTM17-BC

Hammer drill tips – ANSI

CT4





\varnothing [inch]	Height a [mm]	Height Tol. [mm]	Height a1 [mm]	$\varnothing 1$ [mm]	$\varnothing 1$ Tol. [mm]	$\varnothing 2$ [mm]	$\varnothing 2$ Tol. [mm]	Cent. Ø [mm]	Thickness [mm]
7/16"	8.30	± 0.10	5.70	11.76	± 0.10	11.56	± 0.10	3.25	1.950
1/2"	9.15	± 0.10	5.99	13.31	± 0.10	12.90	± 0.10	3.50	2.125
5/8"	9.85	± 0.10	5.90	16.61	± 0.10	16.20	± 0.10	4.09	2.425
9/16"	10.25	± 0.10	6.74	14.89	± 0.10	14.50	± 0.10	3.50	2.125
3/4"	11.55	± 0.10	6.74	19.84	± 0.15	19.44	± 0.15	4.80	2.925
7/8"	12.15	± 0.10	6.68	23.14	± 0.15	22.64	± 0.15	5.64	3.400
1"	13.25	± 0.10	7.11	26.32	± 0.15	25.82	± 0.15	5.64	3.400
1 1/8"	14.70	± 0.10	7.67	29.66	± 0.19	29.16	± 0.19	6.51	3.900
1 1/4"	16.80	± 0.10	9.12	32.83	± 0.19	32.08	± 0.19	7.38	4.400
1 3/8"	16.80	± 0.10	8.84	36.01	± 0.19	35.26	± 0.19	7.38	4.400

Codification code example: CT4- 1/2" CTM17-BC

Hammer drill tips – JAPAN

CT4




\varnothing [mm]	Height a [mm]	Height Tol. [mm]	Height a1 [mm]	$\varnothing 1$ [mm]	$\varnothing 1$ Tol. [mm]	$\varnothing 2$ [mm]	$\varnothing 2$ Tol. [mm]	Cent. Ø [mm]	Thickness [mm]
6.40	5.250	± 0.10	3.780	6.525	± 0.125	6.325	± 0.125	1.960	1.150
8.00	5.950	± 0.15	4.060	8.125	± 0.125	7.925	± 0.125	2.610	1.550
8.50	6.150	± 0.15	4.180	8.625	± 0.125	8.325	± 0.125	2.610	1.550
10.50	7.400	± 0.15	5.120	10.650	± 0.15	10.350	± 0.15	2.890	1.750
12.50	9.000	± 0.15	6.050	12.650	± 0.15	12.350	± 0.15	3.250	1.950
12.70	9.100	± 0.15	6.140	12.850	± 0.15	12.550	± 0.15	3.250	1.950
14.50	10.450	± 0.15	6.970	14.650	± 0.15	14.350	± 0.15	3.500	2.125
16.50	10.100	± 0.25	6.370	16.650	± 0.15	16.350	± 0.15	4.090	2.425

Codification code example: CT4- 6.40 CTM17-BC

Hammer drill tips – METRIC

46000

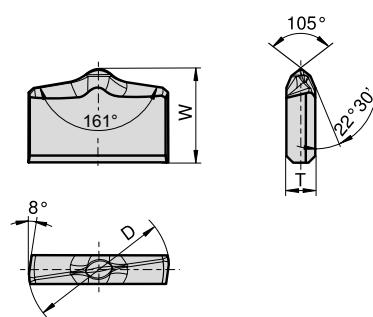


Ø [mm]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
4.00	4.285	± 0.075	4.15	± 0.10	0.950	± 0.05
5.00	5.285	± 0.075	4.65	± 0.10	1.350	± 0.05
5.50	5.785	± 0.075	4.95	± 0.10	1.350	± 0.05
6.00	6.285	± 0.075	4.85	± 0.10	1.550	± 0.05
6.50	6.725	± 0.075	5.30	± 0.10	1.550	± 0.05
7.00	7.285	± 0.075	5.35	± 0.10	1.550	± 0.05
8.00	8.285	± 0.075	5.95	± 0.15	1.950	± 0.05
8.50	8.740	± 0.09	6.30	± 0.15	1.950	± 0.05
9.00	9.300	± 0.09	6.30	± 0.15	1.950	± 0.05
10.00	10.300	± 0.09	6.85	± 0.15	2.125	± 0.075
10.50	10.800	± 0.09	7.30	± 0.15	2.125	± 0.075
11.00	11.340	± 0.09	7.70	± 0.15	2.125	± 0.075
12.00	12.340	± 0.09	8.25	± 0.15	2.425	± 0.075
13.00	13.355	± 0.105	8.70	± 0.15	2.725	± 0.075
14.00	14.355	± 0.105	8.95	± 0.15	2.925	± 0.075
15.00	15.355	± 0.105	9.35	± 0.15	2.925	± 0.075
16.00	16.355	± 0.105	9.35	± 0.15	2.925	± 0.075
17.00	17.355	± 0.105	9.35	± 0.15	2.925	± 0.075
18.00	18.355	± 0.105	9.65	± 0.25	3.400	± 0.10
19.00	19.430	± 0.12	10.40	± 0.25	3.400	± 0.10
20.00	20.430	± 0.12	11.25	± 0.25	3.400	± 0.10
22.00	22.380	± 0.12	12.30	± 0.25	3.900	± 0.10
23.00	23.380	± 0.12	12.30	± 0.25	3.900	± 0.10
24.00	24.380	± 0.12	13.30	± 0.25	4.400	± 0.10
25.00	25.380	± 0.12	13.25	± 0.25	4.400	± 0.10
26.00	26.380	± 0.12	13.25	± 0.25	4.400	± 0.10
28.00	28.380	± 0.12	14.70	± 0.25	4.900	± 0.10
29.00	29.380	± 0.12	14.70	± 0.25	4.900	± 0.10
30.00	30.380	± 0.12	14.70	± 0.25	4.900	± 0.10
32.00	32.520	± 0.15	16.80	± 0.25	5.400	± 0.10
35.00	35.520	± 0.15	18.00	± 0.25	5.900	± 0.10
36.00	36.520	± 0.15	18.25	± 0.25	5.900	± 0.10
38.00	38.570	± 0.20	18.25	± 0.25	5.900	± 0.10
40.00	40.545	± 0.225	19.75	± 0.25	6.400	± 0.10
42.00	42.545	± 0.225	19.25	± 0.25	6.400	± 0.10
44.00	44.545	± 0.225	20.75	± 0.25	6.900	± 0.10
45.00	45.545	± 0.225	20.75	± 0.25	6.900	± 0.10
50.00	50.635	± 0.265	22.75	± 0.25	6.900	± 0.10
52.00	52.635	± 0.265	23.50	± 0.25	6.900	± 0.10

Codification code example: 46000- 4.0 CTM17-BC

Hammer drill tips – ANSI

46600

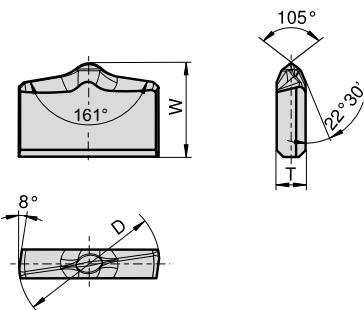


\emptyset [inch]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
1/8"	3.485	± 0.075	4.00	± 0.10	0.950	± 0.050
5/32"	4.265	± 0.075	4.15	± 0.10	0.950	± 0.050
11/64"	4.675	± 0.075	4.65	± 0.10	1.150	± 0.050
3/16"	5.130	± 0.10	4.65	± 0.10	1.150	± 0.050
13/64"	5.510	± 0.10	5.25	± 0.10	1.150	± 0.050
7/32"	5.920	± 0.10	5.30	± 0.10	1.350	± 0.050
15/64"	6.300	± 0.10	5.30	± 0.10	1.550	± 0.050
1/4"	6.710	± 0.10	5.30	± 0.10	1.550	± 0.050
17/64"	7.110	± 0.10	6.15	± 0.10	1.550	± 0.050
9/32"	7.620	± 0.10	6.15	± 0.10	1.550	± 0.050
5/16"	8.410	± 0.10	6.45	± 0.10	1.950	± 0.050
3/8"	10.010	± 0.10	6.85	± 0.10	2.125	± 0.075
7/16"	11.765	± 0.125	7.70	± 0.10	2.125	± 0.075
1/2"	13.335	± 0.125	8.70	± 0.10	2.725	± 0.075
9/16"	14.915	± 0.125	9.10	± 0.10	2.925	± 0.075
5/8"	16.635	± 0.125	9.40	± 0.10	2.925	± 0.075
11/16"	18.235	± 0.125	9.65	± 0.10	3.400	± 0.100
3/4"	19.840	± 0.150	11.55	± 0.10	3.400	± 0.100
13/16"	21.410	± 0.150	11.55	± 0.10	3.400	± 0.100
27/32"	22.230	± 0.150	12.15	± 0.10	3.900	± 0.100
7/8"	23.140	± 0.150	12.15	± 0.10	3.900	± 0.100
15/16"	24.740	± 0.150	13.25	± 0.10	4.400	± 0.100
1"	26.320	± 0.150	13.25	± 0.10	4.400	± 0.100
1 1/16"	28.080	± 0.190	14.70	± 0.10	4.900	± 0.100
1 1/8"	29.660	± 0.190	14.70	± 0.10	4.900	± 0.100
1 1/4"	32.830	± 0.190	16.80	± 0.10	5.400	± 0.100
1 5/16"	34.530	± 0.190	16.80	± 0.10	5.400	± 0.100
1 3/8"	36.010	± 0.190	16.80	± 0.10	5.400	± 0.100
1 7/16"	37.580	± 0.190	17.35	± 0.10	5.900	± 0.100
1 1/2"	39.180	± 0.190	17.35	± 0.10	5.900	± 0.100
1 9/16"	40.585	± 0.255	19.75	± 0.10	6.400	± 0.100
1 3/4"	45.265	± 0.255	20.75	± 0.10	6.900	± 0.100
2"	51.815	± 0.255	23.50	± 0.25	6.900	± 0.100

Codification code example: 46600- 1/8" CTM17-BC

Hammer drill tips – JAPAN

47500

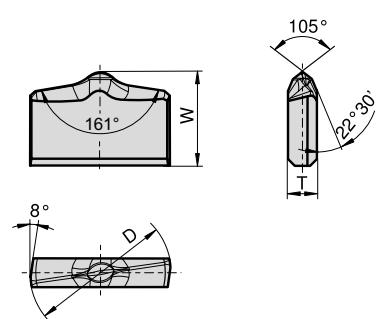


Ø [mm]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
3.4	3.500	±0.10	3.75	±0.10	0.950	±0.05
3.5	3.520	±0.10	3.75	±0.10	0.950	±0.05
3.8	3.900	±0.10	3.75	±0.10	0.950	±0.05
4.0	4.100	±0.10	3.95	±0.10	0.950	±0.05
4.3	4.400	±0.10	4.15	±0.10	0.950	±0.05
4.8	4.900	±0.10	4.45	±0.10	0.950	±0.05
5.0	5.100	±0.10	4.65	±0.10	1.150	±0.05
5.3	5.400	±0.10	4.65	±0.10	1.150	±0.05
5.4	5.500	±0.10	4.95	±0.10	1.350	±0.05
6.0	6.100	±0.10	4.85	±0.10	1.350	±0.05
6.4	6.525	±0.125	5.15	±0.10	1.350	±0.05
7.0	7.125	±0.125	5.35	±0.10	1.550	±0.05
8.0	8.125	±0.125	5.95	±0.15	1.950	±0.05
9.0	9.125	±0.125	6.30	±0.15	1.925	±0.075
9.5	9.625	±0.125	6.30	±0.15	1.925	±0.075
10.0	10.125	±0.125	6.85	±0.15	2.125	±0.075
10.5	10.650	±0.15	7.30	±0.15	2.125	±0.075
11.0	11.150	±0.15	7.70	±0.15	2.125	±0.075
12.0	12.150	±0.15	8.25	±0.15	2.425	±0.075
12.5	12.650	±0.15	8.25	±0.15	2.425	±0.075
12.7	12.850	±0.15	8.25	±0.15	2.425	±0.075
13.5	13.650	±0.15	8.70	±0.15	2.725	±0.075
14.3	14.450	±0.15	8.95	±0.15	2.925	±0.075
14.5	14.650	±0.15	8.95	±0.15	2.925	±0.075
15.0	15.150	±0.15	9.35	±0.25	2.925	±0.075
16.0	16.150	±0.15	9.35	±0.25	2.925	±0.075
16.5	16.650	±0.15	9.35	±0.25	2.925	±0.075
17.0	17.150	±0.15	9.35	±0.25	2.925	±0.075
17.5	17.650	±0.15	9.35	±0.25	2.925	±0.075
18.0	18.175	±0.175	9.65	±0.25	3.400	±0.10
19.0	19.175	±0.175	10.40	±0.25	3.400	±0.10
20.0	20.175	±0.175	11.25	±0.25	3.400	±0.10
21.5	21.675	±0.175	12.15	±0.25	3.900	±0.10
22.0	22.175	±0.175	12.30	±0.25	3.900	±0.10

Codification code example: 47500- 3.4 CTM17-BC

Hammer drill tips – METRIC

50850

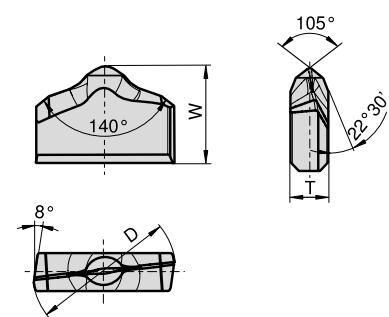


Ø [mm]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
4.0	4.285	±0.075	3.60	±0.10	1.350	±0.05
5.0	5.285	±0.075	4.10	±0.10	1.550	±0.05
5.5	5.785	±0.075	4.50	±0.10	1.550	±0.05
6.0	6.285	±0.075	4.90	±0.10	1.750	±0.05
6.5	6.785	±0.075	5.30	±0.10	1.750	±0.05
7.0	7.285	±0.075	5.70	±0.15	1.950	±0.05
8.0	8.285	±0.075	5.75	±0.15	2.250	±0.05
10.0	10.300	±0.090	7.15	±0.15	2.425	±0.075
12.0	12.340	±0.090	8.55	±0.15	2.725	±0.075
20.0	20.430	±0.120	12.25	±0.25	3.900	±0.100

Codification code example: 50850- 4.0 CTM17-BC

Hammer drill tips – ANSI

50850

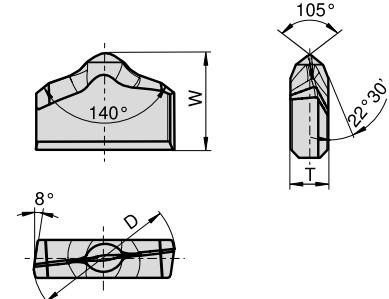

Ø [mm]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
5/32"	4.265	±0.075	3.60	±0.10	1.350	±0.05
3/16"	5.130	±0.100	4.10	±0.10	1.550	±0.05
7/32"	5.920	±0.100	4.50	±0.10	1.550	±0.05
5/16"	8.410	±0.100	5.75	±0.15	2.250	±0.05


Codification code example: 50850- 5/32" CTM17-BC

Hammer drill tips – METRIC

11384



Conforming to PGM

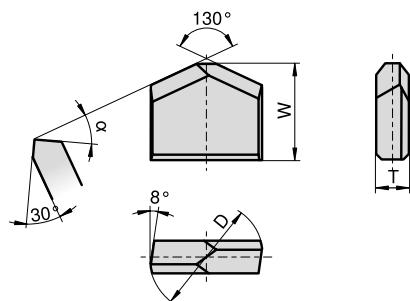


\varnothing [mm]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]	α
4.0	4.21	+0.15	4.5	+0.20	1.0	-0.10	20°
5.0	5.21	+0.15	5.0	+0.20	1.2	-0.10	20°
5.5	5.71	+0.15	5.3	+0.20	1.4	-0.10	20°
6.0	6.21	+0.15	5.3	+0.20	1.4	-0.10	20°
6.5	6.65	+0.15	5.8	+0.20	1.4	-0.10	20°
7.0	7.21	+0.15	5.8	+0.20	1.6	-0.10	20°
8.0	8.21	+0.15	6.5	+0.30	2.0	-0.10	20°
8.5	8.65	+0.18	6.9	+0.30	2.0	-0.10	20°
9.0	9.21	+0.18	6.9	+0.30	2.0	-0.15	20°
10.0	10.21	+0.18	7.5	+0.30	2.2	-0.15	20°
10.5	10.71	+0.18	8.0	+0.30	2.2	-0.15	20°
11.0	11.25	+0.18	8.5	+0.30	2.2	-0.15	20°
12.0	12.25	+0.18	9.0	+0.30	2.5	-0.15	20°
13.0	13.25	+0.21	9.5	+0.30	2.8	-0.15	30°
14.0	14.25	+0.21	9.8	+0.30	3.0	-0.15	30°
15.0	15.25	+0.21	10.5	+0.50	3.0	-0.15	30°
16.0	16.25	+0.21	10.5	+0.50	3.0	-0.15	30°
17.0	17.25	+0.21	10.5	+0.50	3.0	-0.15	30°
18.0	18.25	+0.21	11.0	+0.50	3.5	-0.20	30°
19.0	19.31	+0.24	12.0	+0.50	3.5	-0.20	30°
20.0	20.31	+0.24	13.0	+0.50	3.5	-0.20	30°
22.0	22.26	+0.24	14.0	+0.50	4.0	-0.20	30°
23.0	23.26	+0.24	14.0	+0.50	4.0	-0.20	30°
24.0	24.26	+0.24	15.0	+0.50	4.5	-0.20	30°
25.0	25.26	+0.24	15.0	+0.50	4.5	-0.20	30°
26.0	26.26	+0.24	15.0	+0.50	4.5	-0.20	30°
28.0	28.26	+0.24	17.0	+0.50	5.0	-0.20	30°
29.0	29.26	+0.24	17.0	+0.50	5.0	-0.20	30°
30.0	30.26	+0.24	17.0	+0.50	5.0	-0.20	30°
32.0	32.37	+0.30	19.0	+0.50	5.5	-0.20	30°
35.0	35.37	+0.30	20.5	+0.50	6.0	-0.20	30°
36.0	36.37	+0.30	21.0	+0.50	6.0	-0.20	30°
37.0	37.27	+0.40	21.0	+0.50	6.0	-0.20	30°
38.0	38.37	+0.40	21.0	+0.50	6.0	-0.20	30°
40.0	40.32	+0.45	23.0	+0.50	6.5	-0.20	30°
42.0	42.32	+0.45	24.0	+0.50	6.5	-0.20	30°
44.0	44.32	+0.45	24.0	+0.50	7.0	-0.20	30°
45.0	45.32	+0.45	24.5	+0.50	7.0	-0.20	30°
50.0	50.37	+0.55	26.0	+0.50	7.0	-0.20	30°
52.0	52.37	+0.55	26.0	+0.50	7.0	-0.20	30°

Codification code example: 11384- 4.0 CTM17-BC

Hammer drill tips – ANSI

17871 Inch

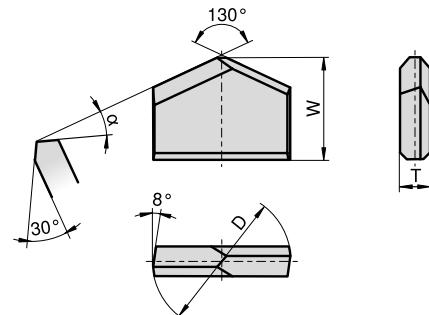


\varnothing [inch]	ANSI code	D [inch]	Tol. [inch]	W [inch]	Tol. [inch]	T [inch]	Tol. [inch]	α
1/8"	HDG 2	0.140	-0.006	0.165	+0.010	0.035	-0.004	20°
5/32"	HDG 2.5	0.171	-0.006	0.177	+0.008	0.039	-0.004	20°
11/64"	HDG 2.75	0.187	-0.006	0.197	+0.008	0.047	-0.004	20°
3/16"	HDG 3	0.206	-0.008	0.197	+0.008	0.047	-0.004	20°
13/64"	HDG 3.25	0.221	-0.008	0.220	+0.008	0.047	-0.004	20°
7/32"	HDG 3.5	0.237	-0.008	0.220	+0.008	0.055	-0.004	20°
15/64"	HDG 3.75	0.252	-0.008	0.220	+0.008	0.055	-0.004	20°
1/4"	HDG 4	0.268	-0.008	0.220	+0.008	0.055	-0.004	20°
17/64"	HDG 4.24	0.275	-0.008	0.256	+0.008	0.063	-0.004	20°
9/32"	HDG 4.5	0.304	-0.008	0.256	+0.008	0.063	-0.004	20°
5/16"	HDG 5	0.335	-0.008	0.256	+0.008	0.078	-0.004	20°
3/8"	HDG 6	0.398	-0.008	0.295	+0.008	0.086	-0.006	20°
7/16"	HDG 7	0.468	-0.010	0.334	+0.008	0.086	-0.006	20°
1/2"	HDG 8	0.530	-0.010	0.374	+0.008	0.110	-0.006	30°
9/16"	HDG 9	0.592	-0.010	0.374	+0.008	0.118	-0.006	30°
5/8"	HDG 10	0.660	-0.010	0.413	+0.008	0.118	-0.006	30°
11/16"	HDG 11	0.723	-0.010	0.433	+0.008	0.137	-0.008	30°
3/4"	HDG 12	0.787	-0.012	0.512	+0.008	0.137	-0.008	30°
13/16"	HDG 13	0.849	-0.012	0.512	+0.008	0.137	-0.008	30°
27/32"	HDG 13.5	0.881	-0.012	0.551	+0.008	0.157	-0.008	30°
7/8"	HDG 14	0.917	-0.012	0.551	+0.008	0.157	-0.008	30°
15/16"	HDG 15	0.980	-0.012	0.590	+0.008	0.177	-0.008	30°
1"	HDG 16	1.042	-0.012	0.590	+0.008	0.177	-0.008	30°
1 1/8"	HDG 18	1.175	-0.015	0.669	+0.008	0.196	-0.008	30°
1 1/4"	HDG 20	1.300	-0.015	0.748	+0.008	0.216	-0.008	30°
1 3/8"	HDG 22	1.425	-0.015	0.748	+0.008	0.216	-0.008	30°
1 1/2"	HDG 24	1.550	-0.015	0.827	+0.008	0.236	-0.008	30°
2"	–	2.050	-0.020	1.024	+0.020	0.276	-0.008	30°

Codification code example: 17871- 1/8" CTM17-BC

Hammer drill tips – ANSI

17871

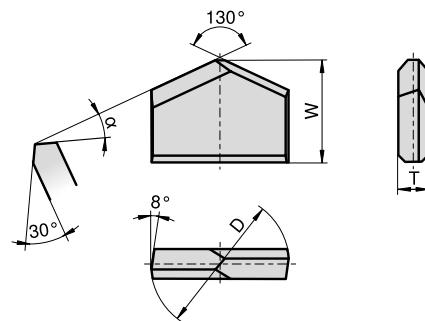


\varnothing [inch]	ANSI code	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]	α
1/8"	HDG 2	3.55	-0.15	4.16	+0.25	0.9	-0.10	20°
5/32"	HDG 2.5	4.34	-0.15	4.50	+0.20	1.0	-0.10	20°
11/64"	HDG 2.75	4.75	-0.15	5.00	+0.20	1.2	-0.10	20°
3/16"	HDG 3	5.23	-0.20	5.00	+0.20	1.2	-0.10	20°
13/64"	HDG 3.25	5.61	-0.20	5.60	+0.20	1.2	-0.10	20°
7/32"	HDG 3.5	6.02	-0.20	5.60	+0.20	1.4	-0.10	20°
15/64"	HDG 3.75	6.40	-0.20	5.60	+0.20	1.4	-0.10	20°
1/4"	HDG 4	6.81	-0.20	5.60	+0.20	1.4	-0.10	20°
17/64"	HDG 4.24	7.31	-0.20	6.60	+0.10	1.6	-0.10	20°
9/32"	HDG 4.5	7.72	-0.20	6.60	+0.20	1.6	-0.10	20°
5/16"	HDG 5	8.51	-0.20	6.60	+0.20	2.0	-0.10	20°
3/8"	HDG 6	10.11	-0.20	7.50	+0.20	2.2	-0.15	20°
7/16"	HDG 7	11.89	-0.25	8.50	+0.20	2.2	-0.15	20°
1/2"	HDG 8	13.46	-0.25	9.50	+0.20	2.8	-0.15	30°
9/16"	HDG 9	15.04	-0.25	9.50	+0.20	3.0	-0.15	30°
5/8"	HDG 10	16.76	-0.25	10.50	+0.20	3.0	-0.15	30°
11/16"	HDG 11	18.36	-0.25	11.00	+0.20	3.5	-0.20	30°
3/4"	HDG 12	19.99	-0.30	13.00	+0.20	3.5	-0.20	30°
13/16"	HDG 13	21.50	-0.30	13.00	+0.20	3.5	-0.20	30°
27/32"	HDG 13.5	22.38	-0.30	14.00	+0.20	4.0	-0.20	30°
7/8"	HDG 14	23.29	-0.30	14.00	+0.20	4.0	-0.20	30°
15/16"	HDG 15	24.89	-0.30	15.00	+0.20	4.5	-0.20	30°
1"	HDG 16	26.47	-0.30	15.00	+0.20	4.5	-0.20	30°
1 1/8"	HDG 18	29.85	-0.38	17.00	+0.20	5.0	-0.20	30°
1 1/4"	HDG 20	33.02	-0.38	19.00	+0.20	5.5	-0.20	30°
1 3/8"	HDG 22	36.20	-0.38	19.00	+0.20	5.5	-0.20	30°
1 1/2"	HDG 24	39.37	-0.38	21.00	+0.20	6.0	-0.20	30°
2"	–	52.07	-0.51	26.00	+0.50	7.0	-0.20	30°

Codification code example: 17871- 1/8" CTM17-BC

Hammer drill tips – JAPAN

26000

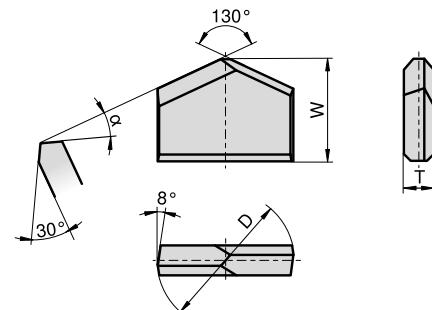


\varnothing [mm]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]	α
4.0	4.0	+0.20	4.2	+0.20	1.0	-0.10	20°
4.3	4.3	+0.20	4.5	+0.20	1.0	-0.10	20°
4.8	4.8	+0.20	4.8	+0.20	1.0	-0.10	20°
5.0	5.0	+0.20	5.0	+0.20	1.2	-0.10	20°
6.0	6.0	+0.20	5.3	+0.20	1.4	-0.10	20°
6.4	6.4	+0.25	5.6	+0.20	1.4	-0.10	20°
7.0	7.0	+0.25	5.8	+0.20	1.6	-0.10	20°
8.0	8.0	+0.25	6.5	+0.30	2.0	-0.10	20°
9.0	9.0	+0.25	6.9	+0.30	2.0	-0.15	20°
9.5	9.5	+0.25	6.9	+0.30	2.0	-0.15	20°
10.0	10.0	+0.25	7.5	+0.30	2.2	-0.15	20°
10.5	10.5	+0.30	8.0	+0.30	2.2	-0.15	20°
11.0	11.0	+0.30	8.5	+0.30	2.2	-0.15	20°
12.0	12.0	+0.30	9.0	+0.30	2.5	-0.15	20°
12.5	12.5	+0.30	9.0	+0.30	2.5	-0.15	20°
12.7	12.7	+0.30	9.0	+0.30	2.5	-0.15	20°
13.5	13.5	+0.30	9.5	+0.30	2.8	-0.15	30°
14.5	14.5	+0.30	9.8	+0.30	3.0	-0.15	30°
15.0	15.0	+0.30	10.5	+0.50	3.0	-0.15	30°
16.0	16.0	+0.30	10.5	+0.50	3.0	-0.15	30°
16.5	16.5	+0.30	10.5	+0.50	3.0	-0.15	30°
17.0	17.0	+0.30	10.5	+0.50	3.0	-0.15	30°
17.5	17.5	+0.30	10.5	+0.50	3.0	-0.15	30°
18.0	18.0	+0.35	11.0	+0.50	3.5	-0.20	30°
19.0	19.0	+0.35	12.0	+0.50	3.5	-0.20	30°
20.0	20.0	+0.35	13.0	+0.50	3.5	-0.20	30°
22.0	22.0	+0.35	14.0	+0.50	4.0	-0.20	30°

Codification code example: 26000- 4.0 CTM17-BC

Hammer drill tips – METRIC

14444

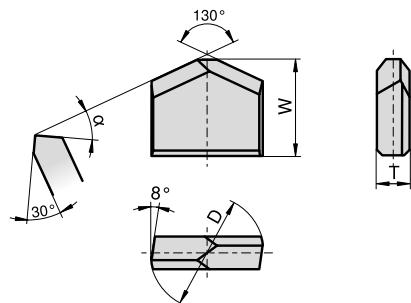

\varnothing [mm]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]	α
4.0	4.20	+0.10	5.0	+0.20	1.4	-0.10	30°
5.0	5.21	+0.15	5.0	+0.20	1.6	-0.10	30°
5.5	5.71	+0.15	5.3	+0.20	1.8	-0.10	30°
6.0	6.21	+0.15	5.3	+0.20	1.8	-0.10	30°
6.5	6.71	+0.15	5.8	+0.20	1.8	-0.10	30°
7.0	7.21	+0.15	6.0	+0.20	2.0	-0.10	30°
8.0	8.21	+0.15	6.5	+0.30	2.3	-0.10	30°

Codification code example: 14444- 4.0 CTM17-BC

38500



\varnothing [mm]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]	α
3.0	3.15	+0.10	3.5	+0.20	0.8	-0.10	30°
3.5	3.65	+0.15	3.5	+0.20	1.2	-0.10	30°
4.5	4.65	+0.15	5.0	+0.20	1.4	-0.10	30°

Codification code example: 38500- 3.0 CTM17-BC

38911




\varnothing [mm]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]	α
4.00	4.30	+0.15	5.1	± 0.10	1.2	-0.07	20°
5.00	5.20	+0.15	5.1	± 0.10	1.4	-0.07	20°
6.00	6.25	+0.15	5.4	± 0.10	1.6	-0.07	20°

Codification code example: 38911- 4.0 CTM17-BC

Hammer drill tips – METRIC

39742

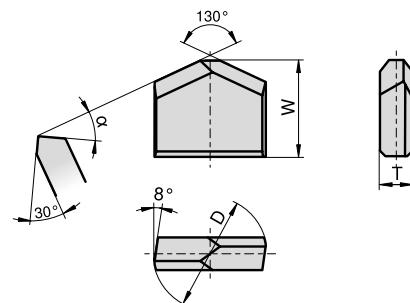

Ø [mm]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]	α
3.5	3.5	+0.10	4.0	+0.25	0.8	-0.07	20°

Codification code example: 39742- 3.5 CTM17-BC

40429



Ø [mm]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]	α
3.5	3.5	+0.10	3.5	+0.20	1.2	-0.10	30°

Codification code example: 40429- 3.5 CTM17-BC


Masonry drill tips

Schlagbohrerplatten

**Plaquettes pour mèche
maçonnerie**

Placchette per punte a forare

**Puntas de brocas para
hormigon**

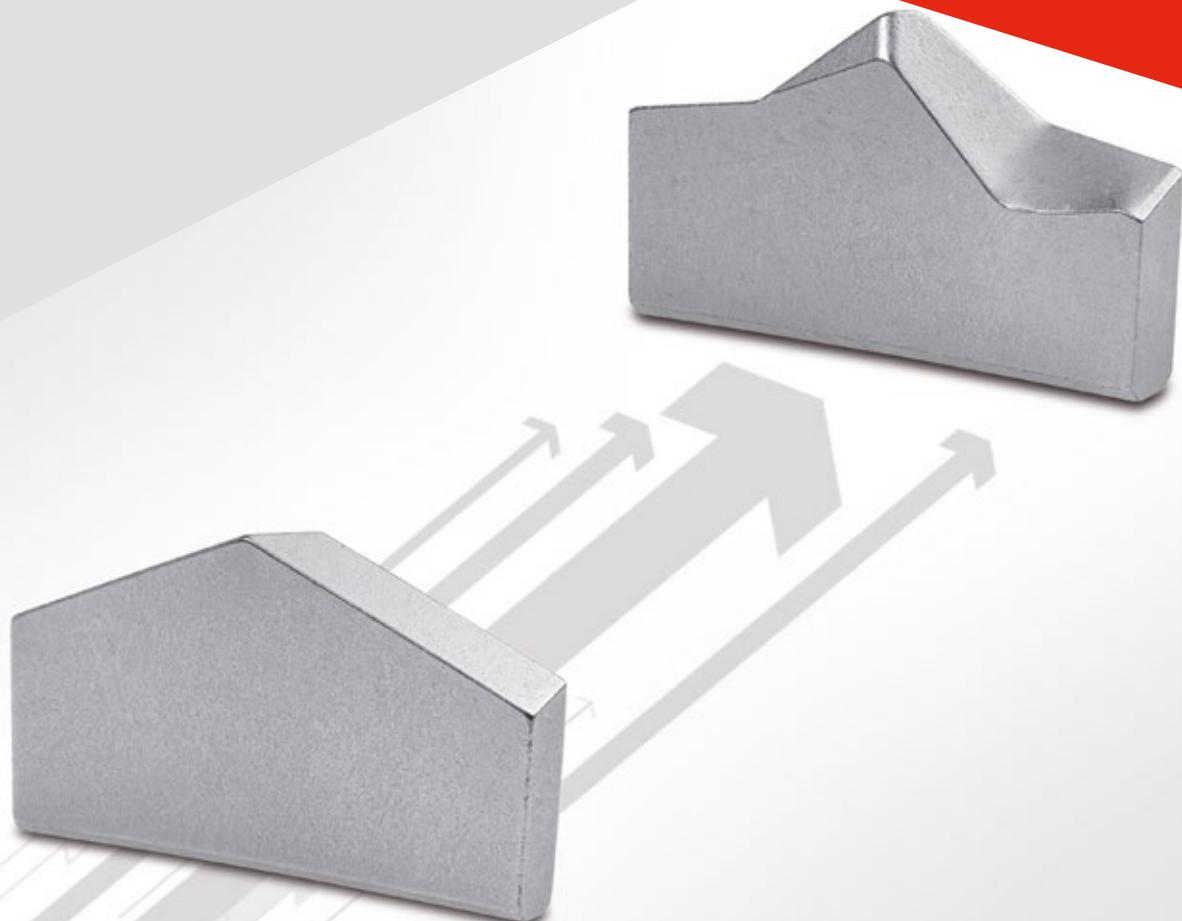

Index

Grades					Page
Composition and properties					38
Applications					39
CERATIZIT Style 58000					40
Premium Masonry Drill Tips	Style	Range Ø	Specificity	PGM Conformity	Page
58000	METRIC (Ø mm)	4 – 20		✓	41
58800	ANSI (Ø inch)	1/8" – 1"			42
Robust Masonry Drill Tips	Style	Range Ø	Specificity	PGM Conformity	Page
11400	METRIC (Ø mm)	3 – 35	130°	✓	43
46973	ANSI (Ø inch)	1/8" – 1"	130°		44
32222	METRIC (Ø mm)	3 – 10	Variant T		45
37071	METRIC (Ø mm)	3.4 – 3.5	130°		46
Speed Masonry Drill Tips	Style	Range Ø	Specificity	PGM Conformity	Page
12500	METRIC (Ø mm)	3 – 14	130°	✓	47
22000	ANSI (Ø inch)	1/8" – 1 1/2"	130°		48–49
16300	METRIC (Ø mm)	12 – 30	130°	✓	50
23500	METRIC (Ø mm)	3 – 20	120°	✓	51
Medium Masonry Drill Tips	Style	Range Ø	Specificity	PGM Conformity	Page
24323	METRIC (Ø mm)	4 – 16	130°	✓	52
43500	METRIC (Ø mm)	3 – 16	118°	✓	53
Eco Masonry Drill Tips	Style	Range Ø	Specificity	PGM Conformity	Page
16000	METRIC (Ø mm)	12 – 30	11400 Reduced T	✓	54
28500	ANSI (Ø inch)	1/8" – 1 1/2"	22000 Reduced W		55
46716	METRIC (Ø mm)	6 – 10	Reduced T & W		56
Accu Masonry Drill Tips	Style	Range Ø	Specificity	PGM Conformity	Page
50210	METRIC (Ø mm)	4 – 25	110°	✓	57

Grades for stone working – composition and properties

Most popular grades MASONARY

CERATIZIT grade code	ISO code	Grain	%Co	HV10	TRS
CTF12-BC	BC05	F	6.0	1640	2200

Most popular grades HAMMER

HAMMER	CERATIZIT grade code	ISO code	Grain	%Co	HV10	TRS
Small Diameter	CTM17-BC	BC20	M	8.5	1420	2900
Large Diameter	CTM17-BC	BC20	M	8.5	1420	2800

Classification of the WC grain size

Average grain size [µm]	Classification	CERATIZIT code
< 0.2	nano	N
0.2 – < 0.5	ultrafine	U
0.5 – < 0.8	submicron	S
0.8 – < 1.3	fine	F
1.3 – < 2.5	medium	M
2.5 – < 6.0	coarse	C
> 6.0	extra-coarse	E

Applications




Type, description	METRIC	ANSI	PGM	Concrete	Stone	Bricks	Granit & Marble	Roofing tile	Tiles	Metal	Wood
58000	✓		✓	●	●	●	●	●			
58800		✓		●	●	●	●	●			
11400	✓		✓	●	●	●		○			
46973		✓		●	●	●		○			
32222	✓			○		●	●	●	●	●	●
37071	✓			●	●	●					
12500	✓		✓	○	●	●	●	●	●	●	●
22000		✓		○	●	●	●	●	●	●	●
16300	✓		✓	○	●	●	●	●	●	●	●
23500	✓		✓	○	●	●	●	●	●	●	●
24323	✓		✓	●	●	●		○	○		
43500	✓		✓	○	●	●	●	●	●	●	●
16000	✓		✓	●	●	●		○	○		
28500		✓		○		●	●	●	●	●	●
46716	✓			○		●	●	●	●	●	●
50210	✓		✓	●		●		○	○		

● Optimum
○ Not optimum

CERATIZIT Style 58000

Advantages of Style 58000

- ▲ Optimised CERATIZIT grade CTF12-BC with a hardness of 1640 HV10
- ▲ Especially well suited for cordless drills

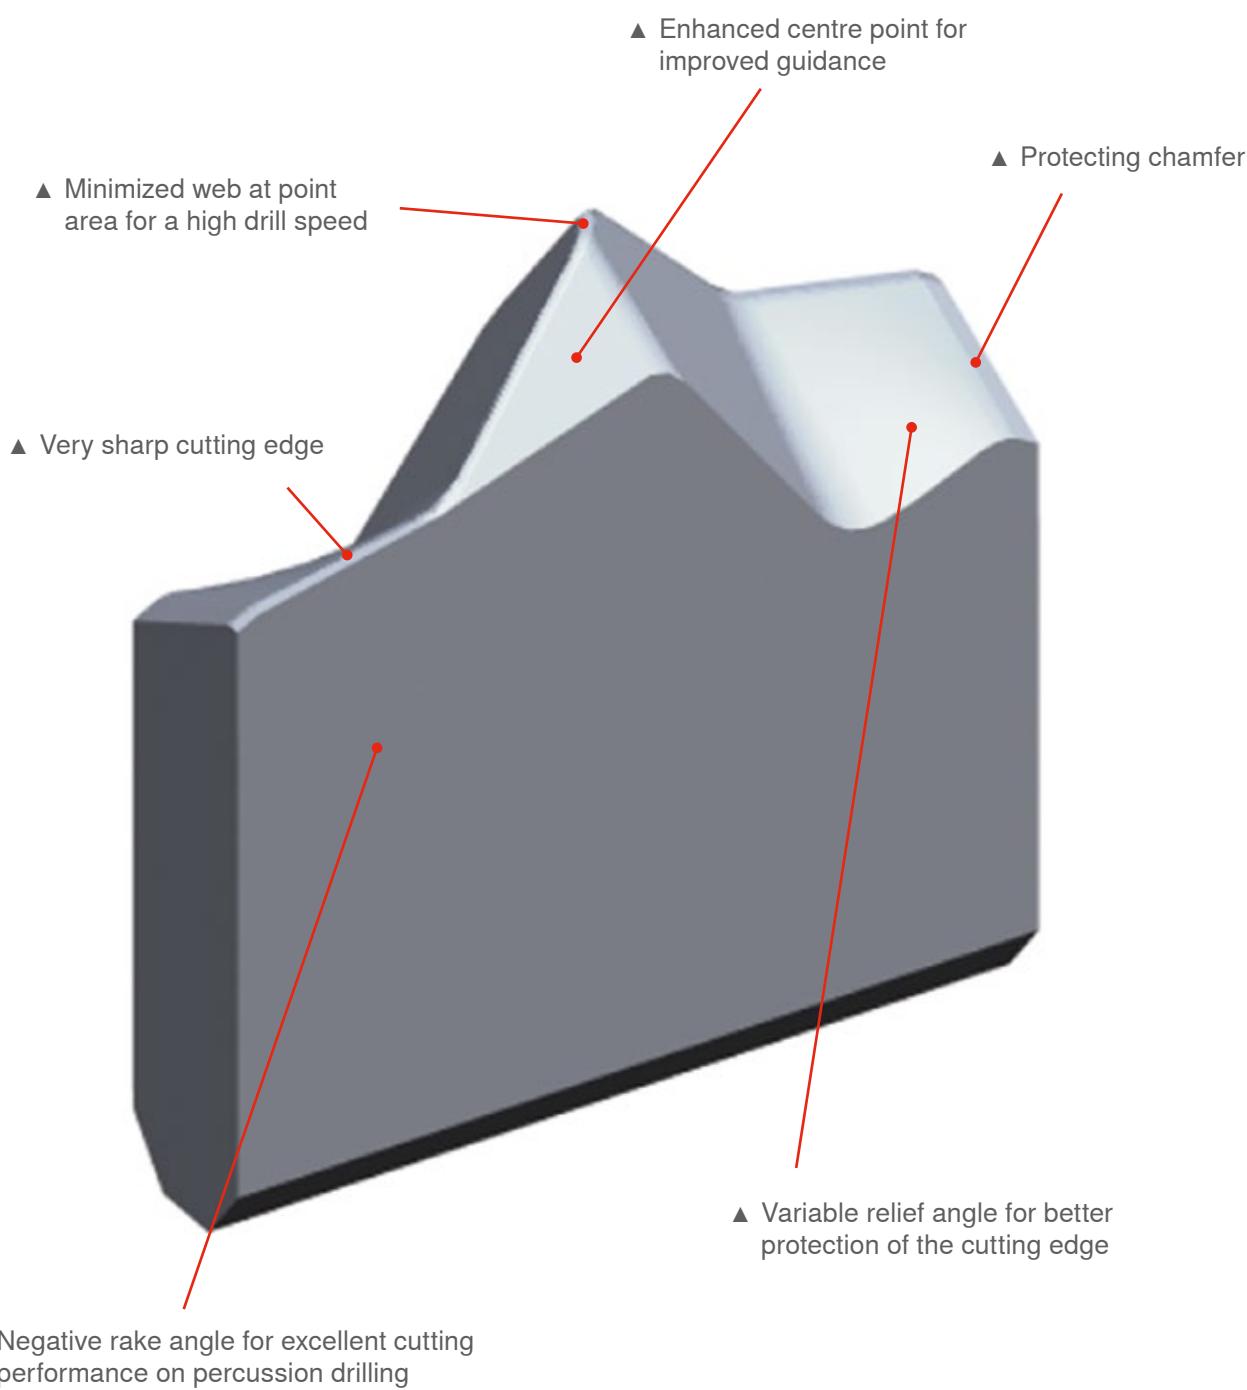


Masonry drill tips – METRIC

58000




Conforming to PGM

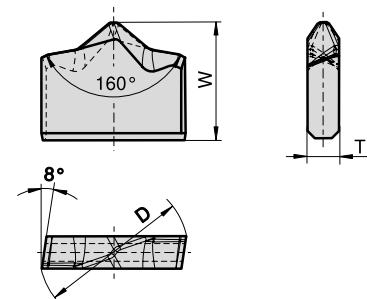

Ø [mm]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
4.0	4.18	+0.12	3.30	±0.10	1.00	-0.07
5.0	5.18	+0.12	4.15	±0.10	1.20	-0.07
5.5	5.68	+0.12	4.55	±0.10	1.20	-0.07
6.0	6.18	+0.12	4.95	±0.10	1.40	-0.10
6.5	6.68	+0.12	5.35	±0.10	1.40	-0.10
7.0	7.21	+0.15	5.75	±0.10	1.60	-0.10
8.0	8.21	+0.15	5.80	±0.15	1.80	-0.10
9.0	9.21	+0.15	6.50	±0.15	2.00	-0.10
10.0	10.21	+0.15	7.20	±0.15	2.20	-0.15
12.0	12.23	+0.20	8.60	±0.15	2.50	-0.15
13.0	13.23	+0.20	9.30	±0.15	2.50	-0.15
14.0	14.23	+0.20	10.00	±0.15	2.80	-0.18
16.0	16.23	+0.20	9.95	±0.25	2.80	-0.18
18.0	18.23	+0.20	11.15	±0.25	2.80	-0.18
20.0	20.24	+0.28	12.40	±0.25	3.00	-0.18

Codification code example: 58000- 4.0 CTF12-BC

Masonry drill tips – ANSI 58800

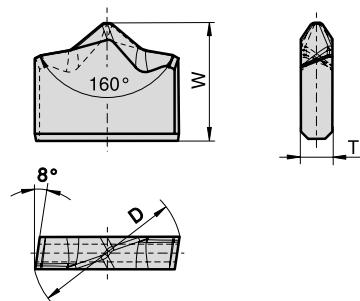

\varnothing [mm]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
1/8"	3.55	-0.15	2.70	± 0.125	0.89	-0.07
5/32"	4.30	-0.12	3.30	± 0.10	1.00	-0.07
3/16"	5.23	-0.20	4.00	± 0.125	1.15	-0.07
7/32"	5.80	-0.12	4.55	± 0.10	1.55	-0.07
1/4"	6.80	-0.20	5.30	± 0.125	1.52	-0.07
5/16"	8.36	-0.15	5.80	± 0.15	1.80	-0.10
3/8"	10.10	-0.20	6.85	± 0.125	1.98	-0.07
7/16"	11.88	-0.25	8.05	± 0.19	1.98	-0.07
5/8"	16.76	-0.25	9.90	± 0.19	2.50	-0.15
3/4"	19.98	-0.30	11.80	± 0.19	3.20	-0.18
7/8"	23.14	-0.30	13.20	± 0.19	3.41	-0.12
1"	26.46	-0.30	14.40	± 0.19	3.50	-0.18


Codification code example: 58800- 1/8" CTF12-BC

Masonry drill tips – METRIC

11400



Conforming to PGM

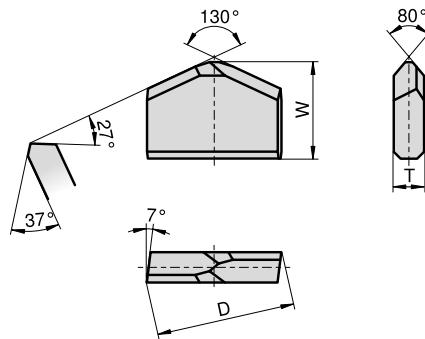


Ø [mm]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
3.0	3.0	+0.25 / +0.15	3.20	+0.20	0.8	-0.07
4.0	4.0	+0.30 / +0.18	3.20	+0.20	1.0	-0.07
4.5	4.5	+0.30 / +0.18	3.60	+0.20	1.0	-0.07
5.0	5.0	+0.30 / +0.18	4.00	+0.20	1.2	-0.07
5.5	5.5	+0.30 / +0.18	4.40	+0.20	1.2	-0.07
6.0	6.0	+0.30 / +0.18	4.80	+0.20	1.4	-0.10
6.5	6.5	+0.30 / +0.18	5.20	+0.20	1.4	-0.10
7.0	7.0	+0.36 / +0.21	5.60	+0.20	1.6	-0.10
7.5	7.5	+0.36 / +0.21	6.00	+0.30	1.6	-0.10
8.0	8.0	+0.36 / +0.21	5.60	+0.30	1.8	-0.10
9.0	9.0	+0.36 / +0.21	6.30	+0.30	2.0	-0.10
9.5	9.5	+0.36 / +0.21	6.70	+0.30	2.0	-0.10
10.0	10.0	+0.36 / +0.21	6.80	+0.30	2.2	-0.15
11.0	11.0	+0.43 / +0.23	7.70	+0.30	2.2	-0.15
12.0	12.0	+0.43 / +0.23	8.20	+0.30	2.5	-0.15
13.0	13.0	+0.43 / +0.23	8.90	+0.30	2.5	-0.15
14.0	14.0	+0.43 / +0.23	9.50	+0.30	2.8	-0.18
16.0	16.0	+0.43 / +0.23	9.60	+0.50	3.0	-0.18
18.0	18.0	+0.43 / +0.23	10.50	+0.50	3.0	-0.18
20.0	20.0	+0.52 / +0.24	11.65	+0.50	3.5	-0.20
22.0	22.0	+0.52 / +0.24	12.50	+0.50	3.5	-0.20
25.0	25.0	+0.52 / +0.24	13.80	+0.50	4.0	-0.20
28.0	28.0	+0.52 / +0.24	15.00	+0.50	4.5	-0.20
32.0	32.0	+0.52 / +0.24	17.00	+0.50	5.0	-0.20
35.0	35.0	+0.52 / +0.24	18.60	+0.50	5.5	-0.20

Codification code example: 11400- 3.0 CTF12-BC

Masonry drill tips – ANSI

46973

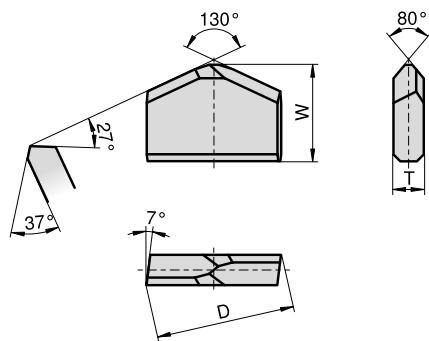


\varnothing [mm]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
1/8"	3.475	± 0.075	4.285	± 0.125	0.855	± 0.035
3/16"	5.130	± 0.100	5.125	± 0.125	1.115	± 0.035
5/16"	8.400	± 0.100	6.725	± 0.125	1.485	± 0.035
3/8"	10.000	± 0.100	8.245	± 0.125	1.945	± 0.035
7/16"	11.755	± 0.125	9.710	± 0.190	1.945	± 0.035
5/8"	16.635	± 0.125	13.140	± 0.190	2.260	± 0.050
3/4"	19.830	± 0.150	15.370	± 0.190	2.260	± 0.050
7/8"	23.140	± 0.150	16.700	± 0.190	2.260	± 0.050
1"	26.310	± 0.150	18.420	± 0.190	3.030	± 0.050

Codification code example: 46973- 1/8" CTF12-BC

Masonry drill tips – METRIC

32222

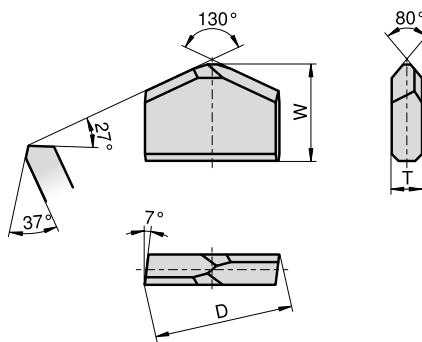


Ø [mm]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
3.0	3.0	+0.25 / +0.15	3.50	+0.20	0.80	-0.07
4.0	4.0	+0.30 / +0.18	3.30	+0.20	1.00	-0.07
5.0	5.0	+0.30 / +0.18	4.20	+0.20	1.20	-0.07
6.0	6.0	+0.30 / +0.18	4.70	+0.20	1.40	-0.10
6.5	6.5	+0.30 / +0.18	4.85	+0.20	1.40	-0.10
7.0	7.0	+0.36 / +0.21	5.15	+0.20	1.60	-0.10
8.0	8.0	+0.36 / +0.21	5.65	+0.30	1.80	-0.10
10.0	10.0	+0.36 / +0.21	6.55	+0.30	2.20	-0.15

Codification code example: 32222- 3.0 CTF12-BC

Masonry drill tips – METRIC

37071

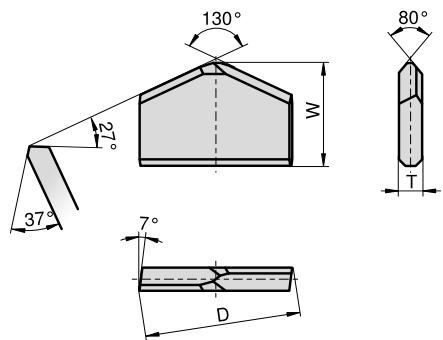

\varnothing [mm]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]	α	β	γ
3.4	3.40	+0.15 / +0.05	4.16	+0.25	0.89	-0.07	20°	30°	9°
3.5	3.50	+0 / +0.20	4.20	+0.25	1.00	-0.10	20°	30°	9°



Codification code example: 37071- 3.40 CTF12-BC

Masonry drill tips – METRIC

12500



Conforming to PGM

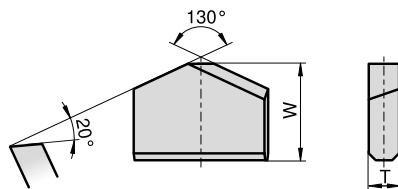


Ø [mm]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
3.0	3.0	+0.25 / +0.15	3.2	+0.20	0.8	-0.07
3.5	3.5	+0.25 / +0.15	3.6	+0.20	1.0	-0.07
4.0	4.0	+0.30 / +0.18	3.2	+0.20	1.0	-0.07
4.5	4.5	+0.30 / +0.18	3.6	+0.20	1.0	-0.07
5.0	5.0	+0.30 / +0.18	4.0	+0.20	1.2	-0.07
5.5	5.5	+0.30 / +0.18	4.4	+0.20	1.2	-0.07
6.0	6.0	+0.30 / +0.18	4.8	+0.20	1.4	-0.10
6.5	6.5	+0.30 / +0.18	5.2	+0.20	1.4	-0.10
7.0	7.0	+0.36 / +0.21	5.6	+0.20	1.6	-0.10
7.5	7.5	+0.36 / +0.21	6.0	+0.20	1.6	-0.10
8.0	8.0	+0.36 / +0.21	5.6	+0.30	1.8	-0.10
9.0	9.0	+0.36 / +0.21	6.3	+0.30	2.0	-0.10
9.5	9.5	+0.36 / +0.21	6.7	+0.30	2.0	-0.10
10.0	10.0	+0.36 / +0.21	6.7	+0.30	2.2	-0.15
11.0	11.0	+0.43 / +0.23	7.7	+0.30	2.2	-0.15
12.0	12.0	+0.43 / +0.23	8.2	+0.30	2.5	-0.15
13.0	13.0	+0.43 / +0.23	8.7	+0.30	2.5	-0.15
14.0	14.0	+0.43 / +0.23	9.3	+0.30	2.8	-0.18

Codification code example: 12500- 3.0 CTF12-BC

Masonry drill tips – ANSI

22000 Inch

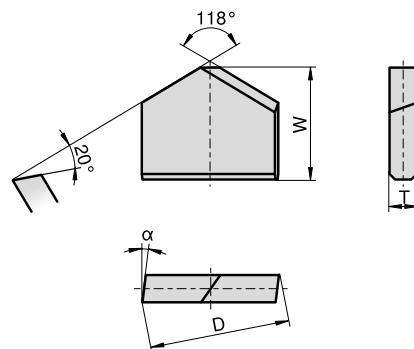


\varnothing [inch]	ANSI code	D [inch]	Tol. [inch]	W [inch]	Tol. [inch]	T [inch]	Tol. [inch]	α
1/8"	MDG 2	0.140	-0.006	0.164	+0.010	0.035	-0.003	9°
5/32"	MDG 2.5	0.171	-0.006	0.180	+0.010	0.035	-0.003	9°
3/16"	MDG 3	0.206	-0.008	0.197	+0.010	0.045	-0.003	8°
7/32"	MDG 3.5	0.237	-0.008	0.220	+0.010	0.045	-0.003	8°
1/4"	MDG 4	0.268	-0.008	0.220	+0.010	0.060	-0.003	8°
9/32"	MDG 4.5	0.304	-0.008	0.260	+0.010	0.060	-0.003	7°
5/16"	MDG 5	0.335	-0.008	0.260	+0.010	0.060	-0.003	7°
3/8"	MDG 6	0.398	-0.008	0.320	+0.010	0.078	-0.003	7°
7/16"	MDG 7	0.468	-0.010	0.375	+0.015	0.078	-0.003	7°
1/2"	MDG 8	0.530	-0.010	0.430	+0.015	0.091	-0.004	7°
9/16"	MDG 9	0.592	-0.010	0.472	+0.015	0.091	-0.004	7°
5/8"	MDG 10	0.660	-0.010	0.510	+0.015	0.091	-0.004	7°
3/4"	MDG 12	0.787	-0.012	0.598	+0.015	0.091	-0.004	7°
7/8"	MDG 14	0.917	-0.012	0.650	+0.015	0.091	-0.004	7°
1"	MDG 16	1.042	-0.012	0.718	+0.015	0.122	-0.005	7°
1 1/8"	MDG 18	1.175	-0.018	0.758	+0.020	0.122	-0.008	7°
1 1/4"	MDG 20	1.300	-0.018	0.758	+0.020	0.122	-0.008	7°
1 3/8"	MDG 22	1.425	-0.018	0.843	+0.020	0.122	-0.008	7°
1 1/2"	MDG 24	1.550	-0.018	0.843	+0.020	0.122	-0.008	7°

Codification code example: 22000- 1/8" CTF12-BC

Masonry drill tips – ANSI

22000

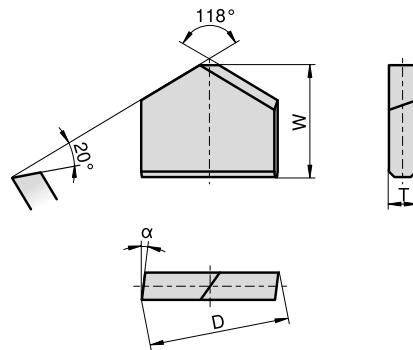

\varnothing [inch]	ANSI code	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]	α
1/8"	MDG 2	3.55	-0.15	4.16	+0.25	0.89	-0.07	9°
5/32"	MDG 2.5	4.34	-0.15	4.57	+0.25	0.89	-0.07	9°
3/16"	MDG 3	5.23	-0.20	5.00	+0.25	1.15	-0.07	8°
7/32"	MDG 3.5	6.01	-0.20	5.58	+0.25	1.15	-0.07	8°
1/4"	MDG 4	6.80	-0.20	5.58	+0.25	1.52	-0.07	8°
9/32"	MDG 4.5	7.72	-0.20	6.60	+0.25	1.52	-0.07	7°
5/16"	MDG 5	8.50	-0.20	6.60	+0.25	1.52	-0.07	7°
3/8"	MDG 6	10.10	-0.20	8.12	+0.25	1.98	-0.07	7°
7/16"	MDG 7	11.88	-0.25	9.52	+0.38	1.98	-0.07	7°
1/2"	MDG 8	13.46	-0.25	10.92	+0.38	2.31	-0.10	7°
9/16"	MDG 9	15.03	-0.25	11.98	+0.38	2.31	-0.10	7°
5/8"	MDG 10	16.76	-0.25	12.95	+0.38	2.31	-0.10	7°
3/4"	MDG 12	19.98	-0.30	15.18	+0.38	2.31	-0.10	7°
7/8"	MDG 14	23.29	-0.30	16.51	+0.38	2.31	-0.10	7°
1"	MDG 16	26.46	-0.30	18.23	+0.38	3.09	-0.12	7°
1 1/8"	MDG 18	29.84	-0.45	19.25	+0.50	3.09	-0.20	7°
1 1/4"	MDG 20	33.02	-0.45	19.25	+0.50	3.09	-0.20	7°
1 3/8"	MDG 22	36.19	-0.45	21.41	+0.50	3.09	-0.20	7°
1 1/2"	MDG 24	39.37	-0.45	21.41	+0.50	3.09	-0.20	7°


Codification code example: 22000- 1/8" CTF12-BC

Masonry drill tips – METRIC

16300



Conforming to PGM

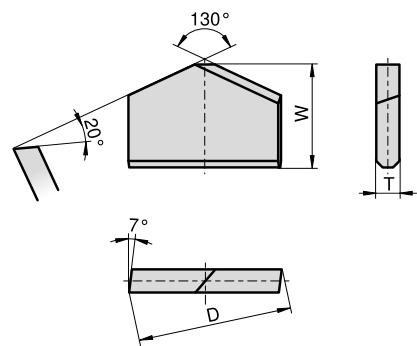

Ø [mm]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
12.0	12.0	+0.43 / +0.23	8.0	+0.30	1.8	-0.15
13.0	13.0	+0.43 / +0.23	8.7	+0.30	2.0	-0.15
14.0	14.0	+0.43 / +0.23	9.3	+0.30	2.1	-0.18
15.0	15.0	+0.43 / +0.23	9.6	+0.30	2.2	-0.18
16.0	16.0	+0.43 / +0.23	9.6	+0.50	2.2	-0.18
17.0	17.0	+0.43 / +0.23	10.5	+0.50	2.2	-0.18
18.0	18.0	+0.43 / +0.23	10.5	+0.50	2.2	-0.18
19.0	19.0	+0.43 / +0.23	11.5	+0.50	2.5	-0.18
20.0	20.0	+0.52 / +0.24	11.5	+0.50	2.5	-0.20
22.0	22.0	+0.52 / +0.24	12.5	+0.50	2.5	-0.20
24.0	24.0	+0.52 / +0.24	15.0	+0.50	3.0	-0.20
25.0	25.0	+0.52 / +0.24	15.0	+0.50	3.0	-0.20
26.0	26.0	+0.52 / +0.24	15.0	+0.50	3.0	-0.20
30.0	30.0	+0.52 / +0.24	16.0	+0.50	4.0	-0.20


Codification code example: 16300- 12.0 CTM17-BC

Masonry drill tips – METRIC

23500



Conforming to PGM

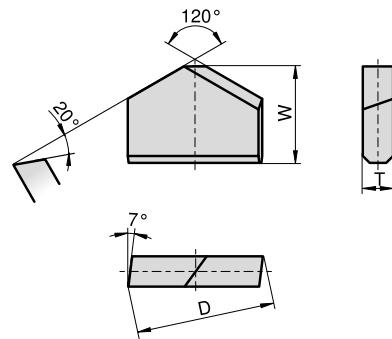

Ø [mm]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
3.0	3.0	+0.25 / +0.15	3.2	+0.20	0.8	-0.07
3.5	3.5	+0.25 / +0.15	3.6	+0.20	1.0	-0.07
4.0	4.0	+0.30 / +0.18	3.2	+0.20	1.0	-0.07
4.5	4.5	+0.30 / +0.18	3.6	+0.20	1.0	-0.07
5.0	5.0	+0.30 / +0.18	4.0	+0.20	1.2	-0.07
5.5	5.5	+0.30 / +0.18	4.4	+0.20	1.2	-0.07
6.0	6.0	+0.30 / +0.18	4.8	+0.20	1.4	-0.10
6.5	6.5	+0.30 / +0.18	5.2	+0.20	1.4	-0.10
7.0	7.0	+0.36 / +0.21	5.6	+0.20	1.6	-0.10
8.0	8.0	+0.36 / +0.21	5.6	+0.30	1.8	-0.10
9.0	9.0	+0.36 / +0.21	6.3	+0.30	2.0	-0.10
10.0	10.0	+0.36 / +0.21	7.0	+0.30	2.2	-0.15
11.0	11.0	+0.43 / +0.23	7.7	+0.30	2.2	-0.15
12.0	12.0	+0.43 / +0.23	8.4	+0.30	2.5	-0.15
13.0	13.0	+0.43 / +0.23	9.1	+0.30	2.5	-0.15
14.0	14.0	+0.43 / +0.23	9.3	+0.30	2.8	-0.18
16.0	16.0	+0.43 / +0.23	9.6	+0.50	3.0	-0.18
18.0	18.0	+0.43 / +0.23	10.50	+0.50	3.0	-0.18
20.0	20.0	+0.52 / +0.25	11.50	+0.50	3.5	-0.20


Codification code example: 23500- 3.0 CTF12-BC

Masonry drill tips – METRIC

24323



Conforming to PGM

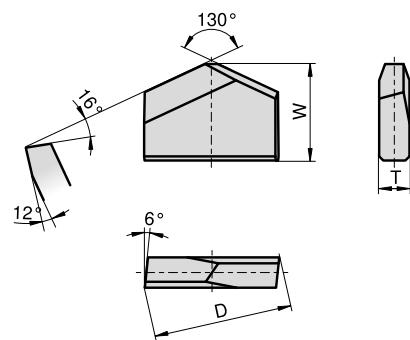

\varnothing [mm]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
4.0	4.0	+0.30 / +0.18	3.2	+0.20	1.0	-0.07
5.0	5.0	+0.30 / +0.18	4.0	+0.20	1.2	-0.07
5.5	5.5	+0.30 / +0.18	4.4	+0.20	1.2	-0.07
6.0	6.0	+0.30 / +0.18	4.8	+0.20	1.4	-0.10
6.5	6.5	+0.36 / +0.21	5.2	+0.20	1.4	-0.10
7.0	7.0	+0.36 / +0.21	5.6	+0.20	1.6	-0.10
8.0	8.0	+0.36 / +0.21	5.6	+0.30	1.8	-0.10
9.0	9.0	+0.36 / +0.21	6.3	+0.30	2.0	-0.10
10.0	10.0	+0.36 / +0.21	7.0	+0.30	2.2	-0.15
12.0	12.0	+0.43 / +0.23	8.4	+0.30	2.5	-0.15
14.0	14.0	+0.43 / +0.23	9.75	+0.30	2.8	-0.18
16.0	16.0	+0.43 / +0.23	9.6	+0.50	3.0	-0.18


Codification code example: 24323- 4.0 CTM17-BC

Masonry drill tips – METRIC

43500



Conforming to PGM

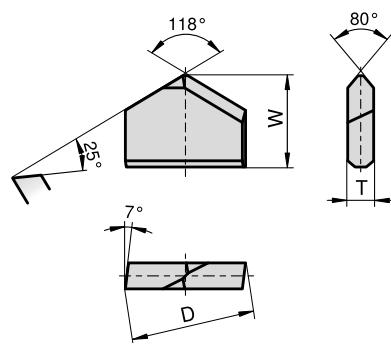

Ø [mm]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
3.0	3.0	+0.25 / +0.15	3.2	+0.20	0.8	-0.07
4.0	4.0	+0.30 / +0.18	3.2	+0.20	1.0	-0.07
5.0	5.0	+0.30 / +0.18	4.0	+0.20	1.2	-0.07
5.5	5.5	+0.30 / +0.18	4.4	+0.20	1.2	-0.07
6.0	6.0	+0.30 / +0.18	4.8	+0.20	1.4	-0.10
6.5	6.5	+0.30 / +0.18	5.2	+0.20	1.4	-0.10
7.0	7.0	+0.36 / +0.21	5.6	+0.20	1.6	-0.10
8.0	8.0	+0.36 / +0.21	5.6	+0.30	1.8	-0.10
9.0	9.0	+0.36 / +0.21	6.3	+0.30	2.0	-0.10
10.0	10.0	+0.36 / +0.21	7.0	+0.30	2.2	-0.15
11.0	11.0	+0.43 / +0.23	7.7	+0.30	2.2	-0.15
12.0	12.0	+0.43 / +0.23	8.4	+0.30	2.5	-0.15
14.0	14.0	+0.43 / +0.23	9.8	+0.30	2.1	-0.18
16.0	16.0	+0.43 / +0.23	9.8	+0.50	2.2	-0.18


Codification code example: 43500- 3.0 CTF12-BC

Masonry drill tips – METRIC

16000



Conforming to PGM

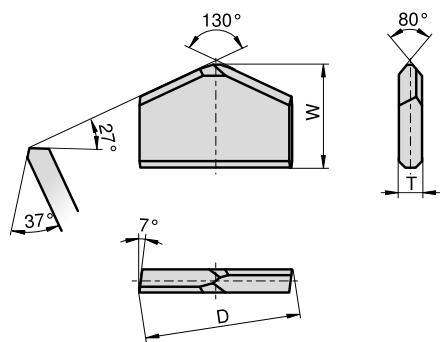


\varnothing [mm]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]	α	β	γ
12.0	12.0	+0.43 / +0.23	8.2	+0.30	1.8	-0.15	27°	37°	7°
13.0	13.0	+0.43 / +0.23	8.7	+0.30	2.0	-0.15	27°	37°	7°
14.0	14.0	+0.43 / +0.23	9.3	+0.30	2.1	-0.18	27°	37°	7°
15.0	15.0	+0.43 / +0.23	9.6	+0.30	2.2	-0.18	27°	37°	7°
16.0	16.0	+0.43 / +0.23	9.6	+0.50	2.2	-0.18	27°	37°	7°
17.0	17.0	+0.43 / +0.23	10.5	+0.50	2.2	-0.18	27°	37°	7°
18.0	18.0	+0.43 / +0.23	10.5	+0.50	2.2	-0.18	27°	37°	7°
19.0	19.0	+0.43 / +0.23	11.5	+0.50	2.5	-0.18	27°	37°	7°
20.0	20.0	+0.52 / +0.24	11.5	+0.50	2.5	-0.20	27°	37°	7°
22.0	22.0	+0.52 / +0.24	12.5	+0.50	2.5	-0.20	27°	37°	7°
24.0	24.0	+0.52 / +0.24	15.0	+0.50	3.0	-0.20	27°	37°	7°
25.0	25.0	+0.52 / +0.24	15.0	+0.50	3.0	-0.20	27°	37°	7°
26.0	26.0	+0.52 / +0.24	15.0	+0.50	3.0	-0.20	27°	37°	7°
28.0	28.0	+0.52 / +0.24	15.0	+0.50	4.0	-0.20	27°	37°	7°
30.0	30.0	+0.52 / +0.24	16.0	+0.50	4.0	-0.20	27°	37°	7°

Codification code example: 16000- 12.0 CTM17-BC

Masonry drill tips – ANSI

28500 Inch

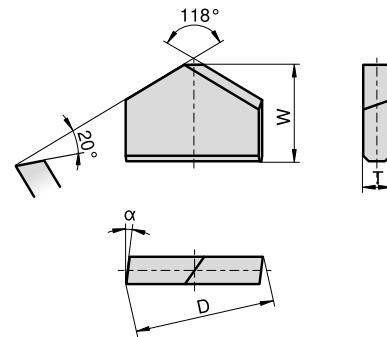

\varnothing [inch]	D [inch]	Tol. [inch]	W [inch]	Tol. [inch]	T [inch]	Tol. [inch]	α
1/8"	0.140	-0.006	0.138	+0.010	0.035	-0.003	9°
5/32"	0.171	-0.006	0.158	+0.010	0.035	-0.003	9°
3/16"	0.206	-0.008	0.177	+0.010	0.045	-0.003	8°
1/4"	0.268	-0.008	0.197	+0.010	0.060	-0.003	8°
5/16"	0.335	-0.008	0.236	+0.010	0.060	-0.003	7°
3/8"	0.398	-0.008	0.276	+0.010	0.078	-0.003	7°
1/2"	0.530	-0.010	0.335	+0.015	0.091	-0.004	7°
5/8"	0.660	-0.010	0.394	+0.015	0.091	-0.004	7°
3/4"	0.787	-0.012	0.473	+0.015	0.091	-0.004	7°
7/8"	0.917	-0.012	0.532	+0.015	0.091	-0.004	7°
1"	1.042	-0.012	0.575	+0.015	0.122	-0.005	7°
1 1/8"	1.175	-0.018	0.630	+0.020	0.122	-0.008	7°
1 1/4"	1.300	-0.018	0.650	+0.020	0.122	-0.008	7°
1 3/8"	1.425	-0.018	0.689	+0.020	0.122	-0.008	7°
1 1/2"	1.550	-0.018	0.709	+0.020	0.122	-0.008	7°

Codification code example: 28500- 1/8" CTM17-BC


28500

\varnothing [inch]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]	α
1/8"	3.55	-0.15	3.5	+0.25	0.89	-0.07	9°
5/32"	4.34	-0.15	4.0	+0.25	0.89	-0.07	9°
3/16"	5.23	-0.20	4.5	+0.25	1.15	-0.07	8°
1/4"	6.80	-0.20	5.0	+0.25	1.52	-0.07	8°
5/16"	8.50	-0.20	6.0	+0.25	1.52	-0.07	7°
3/8"	10.10	-0.20	7.0	+0.25	1.98	-0.07	7°
1/2"	13.46	-0.25	8.5	+0.38	2.31	-0.10	7°
5/8"	16.76	-0.25	10.0	+0.38	2.31	-0.10	7°
3/4"	19.98	-0.30	12.0	+0.38	2.31	-0.10	7°
7/8"	23.29	-0.30	13.5	+0.38	2.31	-0.10	7°
1"	26.46	-0.30	14.6	+0.38	3.09	-0.12	7°
1 1/8"	29.84	-0.45	16.0	+0.50	3.09	-0.20	7°
1 1/4"	33.02	-0.45	16.5	+0.50	3.09	-0.20	7°
1 3/8"	36.19	-0.45	17.5	+0.50	3.09	-0.20	7°
1 1/2"	39.37	-0.45	18.0	+0.50	3.09	-0.20	7°

Codification code example: 28500- 1/8" CTM17-BC

Masonry drill tips – METRIC

46716

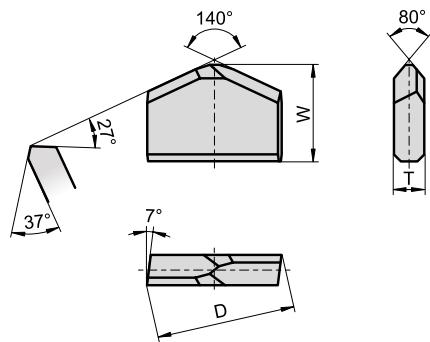

Ø [mm]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
6.0	6.240	±0.060	3.90	±0.10	1.050	±0.050
6.5	6.740	±0.060	4.40	±0.10	1.050	±0.050
8.0	8.285	±0.075	5.15	±0.15	1.125	±0.050
10.0	10.285	±0.075	5.55	±0.15	1.325	±0.075


Codification code example: 46716- 6.0 CTM17-BC

Masonry drill tips – METRIC

50210



Conforming to PGM

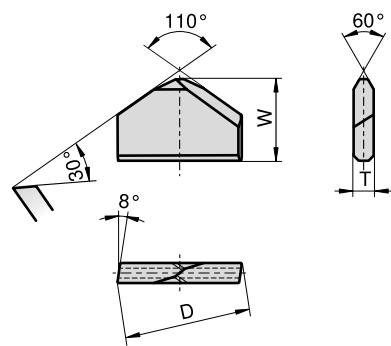

Ø [mm]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
4.0	4.0	+0.40 / +0.15	3.40	+0.20	1.0	-0.07
4.5	4.5	+0.40 / +0.15	3.90	+0.20	1.0	-0.07
5.0	5.0	+0.40 / +0.15	4.30	+0.20	1.2	-0.07
5.5	5.5	+0.40 / +0.15	4.70	+0.20	1.2	-0.07
6.0	6.0	+0.40 / +0.15	5.20	+0.20	1.4	-0.10
6.5	6.5	+0.40 / +0.15	5.70	+0.20	1.4	-0.10
7.0	7.0	+0.45 / +0.20	6.10	+0.20	1.6	-0.10
8.0	8.0	+0.45 / +0.20	6.05	+0.30	1.8	-0.10
10.0	10.0	+0.45 / +0.20	7.60	+0.30	2.2	-0.15
12.0	12.0	+0.50 / +0.20	9.35	+0.30	2.0	-0.15
13.0	13.0	+0.50 / +0.20	10.05	+0.30	2.2	-0.15
14.0	14.0	+0.50 / +0.20	10.85	+0.30	2.5	-0.18
16.0	16.0	+0.50 / +0.20	10.90	+0.50	2.5	-0.18
18.0	18.0	+0.50 / +0.20	12.10	+0.50	3.0	-0.18
20.0	20.0	+0.55 / +0.20	13.45	+0.50	3.2	-0.20
22.0	22.0	+0.55 / +0.20	13.70	+0.50	3.5	-0.20
25.0	25.0	+0.55 / +0.20	15.50	+0.50	4.1	-0.20

Codification code example: 50210- 4.0 CTF12-BC


Special tips

Sonderplatten

Plaquettes spéciales

Plachette non standard

Puntas especiales

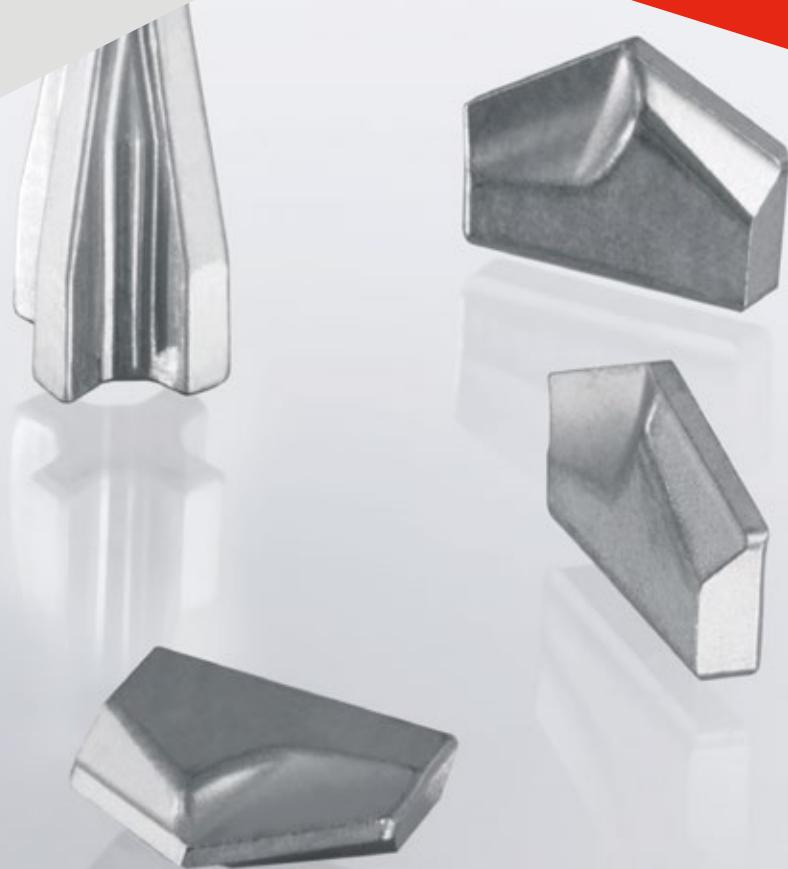

Index

METAL CUTTING TIPS				Page
Applications				60
Metal Cutting Tips	Style	Range Ø	PGM Conformity	Page
12500	METRIC (\varnothing mm)	3 – 8		61
14818	METRIC (\varnothing mm)	8 – 23		61

GLASS DRILLING TIPS				Page
Applications				62
Glass drilling tips	Style	Range Ø	PGM Conformity	Page
17353	METRIC (\varnothing mm)	3 – 13		63
50278	METRIC (\varnothing mm)	4 – 10		63

Metal cutting tips

Metallbohrerplatten

Plaquettes pour coupe métaux

Plaquette per punte per lavorazione metall

Puntas de broca para metallo

Applications



Type, description	METRIC	Metal
12500	✓	○
14818	✓	●

- Optimum
- Not optimum




Metal cutting tips – METRIC

12500



Grade recommendation:
CTS20-BC
CTS18D

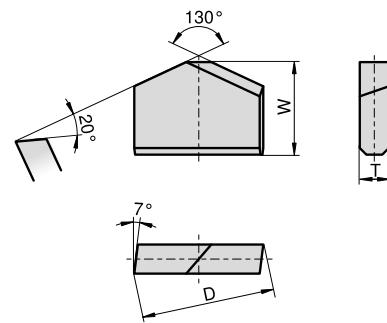


Ø [mm]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
3.0	3.0	+0.25 / +0.15	3.2	+0.20	0.8	-0.07
3.5	3.5	+0.25 / +0.15	3.6	+0.20	1.0	-0.07
4.0	4.0	+0.30 / +0.18	3.2	+0.20	1.0	-0.07
4.5	4.5	+0.30 / +0.18	3.6	+0.20	1.0	-0.07
5.0	5.0	+0.30 / +0.18	4.0	+0.20	1.2	-0.07
5.5	5.5	+0.30 / +0.18	4.4	+0.20	1.2	-0.07
6.0	6.0	+0.30 / +0.18	4.8	+0.20	1.4	-0.10
6.5	6.5	+0.30 / +0.18	5.2	+0.20	1.4	-0.10
7.0	7.0	+0.36 / +0.21	5.6	+0.20	1.6	-0.10
7.5	7.5	+0.36 / +0.21	6.0	+0.20	1.6	-0.10
8.0	8.0	+0.36 / +0.21	5.6	+0.30	1.8	-0.10

Codification code example: 12500- 3.0 CTS18-D

14818



Grade recommendation:
CTS20-BC
CTS18D

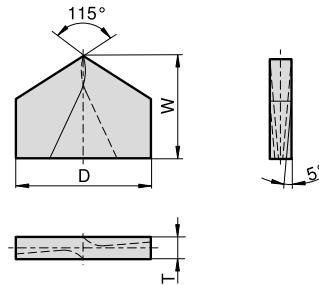

Ø [mm]	D [mm]	Tol. [mm]	W [mm]	T [mm]	Tol. [mm]
8.0	8.5	+0.5	7.1	1.6	-0.15
8.5	9.0	+0.5	8.0	2.0	-0.15
9.0	9.5	+0.5	8.0	2.0	-0.15
9.5	10.0	+0.5	8.5	2.0	-0.15
10.0	10.5	+0.5	8.5	2.0	-0.20
10.5	11.3	+0.5	9.5	2.2	-0.20
11.0	11.8	+0.5	9.5	2.2	-0.20
11.5	12.3	+0.6	10.6	2.5	-0.20
12.0	12.8	+0.6	10.6	2.5	-0.20
13.0	13.8	+0.6	12.5	2.5	-0.20
14.0	14.8	+0.7	12.5	2.5	-0.20
15.0	15.8	+0.7	14.0	2.8	-0.25
16.0	16.8	+0.7	14.0	2.8	-0.25
17.0	17.8	+0.7	16.0	3.0	-0.25
18.0	18.8	+0.7	16.0	3.0	-0.25
19.0	19.8	+0.7	18.0	3.5	-0.30
20.0	20.8	+0.8	18.0	3.5	-0.30
21.0	22.8	+0.8	18.0	3.5	-0.30
22.0	23.0	+0.8	19.0	4.0	-0.30
23.0	24.0	+0.8	19.0	4.0	-0.30

Codification code example: 14818- 8.0 CTS18-D

Glass drill tips

Glasbohrerplatten

Plaquettes mèche pour le travail du verre

Placchette per punte per lavorazione vetro

Puntas de broca para vidrio

Applications



Type, description	METRIC	Glass	Tiles
17353	✓	●	●
50278	✓	●	●

● Optimum
○ Not optimum




Glass drill tips – METRIC

17353



Grade recommendation:
CHROMIUM GRADE:
CTS06-KC
WC-Cobalt GRADE:
CTF12-BC

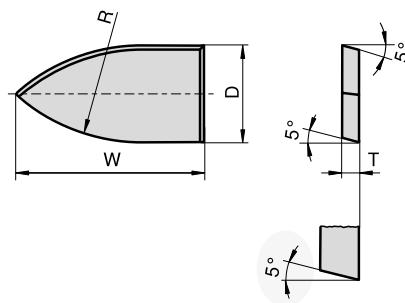


Ø [mm (inch)]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]	R [mm]
3.0	3.4	-0.20	6.2	± 0.20	1.1	-0.10	6
4.0	4.4	-0.20	8.2	± 0.20	1.1	-0.10	8
5.0	5.4	-0.20	10.2	± 0.20	1.3	-0.10	10
6.0	6.4	-0.20	12.2	± 0.20	1.3	-0.10	12
6.5 (1/4")	6.8	-0.20	12.2	± 0.20	1.5	-0.10	13
7.0	7.4	-0.25	14.2	± 0.20	1.5	-0.10	14
8.0	8.4	-0.25	16.2	± 0.20	1.8	-0.10	16
9.0	9.4	-0.25	18.2	± 0.20	1.8	-0.10	18
10.0 (3/8")	10.4	-0.25	20.2	± 0.20	1.8	-0.10	20
12.0	12.4	-0.25	24.2	± 0.20	2.3	-0.10	24
13.0 (1/2")	13.4	-0.30	26.2	± 0.20	2.3	-0.10	26

Codification code example: 17353- 3.0 CTF12-BC

50278



Grade recommendation:
CHROMIUM GRADE:
CTS06-KC
WC-Cobalt GRADE:
CTF12-BC

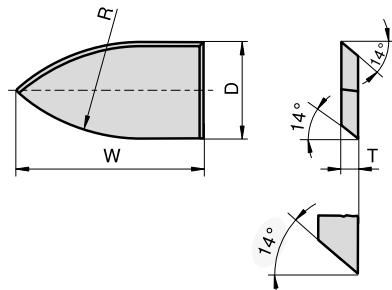

Ø [mm]	D [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]	R [mm]
4.0	4.4	-0.20	8.2	± 0.10	1.1	-0.10	8
5.0	5.4	-0.20	10.2	± 0.10	1.3	-0.10	10
6.0	6.4	-0.20	12.2	± 0.15	1.3	-0.10	12
8.0	8.4	-0.30	16.2	± 0.15	1.8	-0.10	16
10.0	10.4	-0.30	20.2	± 0.20	1.8	-0.10	20

Codification code example: 50278- 4.0 CTF12-BC

Core drill tips
Bohrkronenplatten
Plaquettes pour trépan
Placchette per punte a corona
Plaquitas para trepano



Index

Grades			Page
Composition and properties			66
Standard Core Drill Tips			
12083	METRIC (\varnothing mm)	9.0 x 4.5 x 3.0	67
12641	METRIC (\varnothing mm)	9.0 x 6.5 x 4.0 10.0 x 6.5 x 4.0	67
13326	METRIC (\varnothing mm)	9.0 x 5.5 x 3.5	67
14420	METRIC (\varnothing mm)	10.0 x 5.0 x 3.5	67
With chamfer			
14157	METRIC (\varnothing mm)	12.0 x 7.0 x 4.0	68
23985	METRIC (\varnothing mm)	8.0 x 6.6 x 4.1	68
28537	METRIC (\varnothing mm)	12.5 x 7.2 x 4.1	68
30838	METRIC (\varnothing mm)	8.1 x 7.1 x 4.1	68
With point			
16623	METRIC (\varnothing mm)	8.5 x 6.5 x 3.9	69
39241	METRIC (\varnothing mm)	8.0 x 4.0 x 3.0 8.0 x 5.5 x 3.6	69
42067	METRIC (\varnothing mm)	10.3 x 5.0 x 3.0	69
50809	METRIC (\varnothing mm)	8.0 x 7.2 x 4.0 12.5 x 7.2 x 4.0	69

Grades for stone working – composition and properties

WC-Cobalt Grades


CERATIZIT grade code	ISO code	U.S. code	Binder [m %]	Density [g/cm ³]	Hardness			Transverse Rupture Strength	
					HV10	HV30	HRA	[MPa]	[P.S.I.]
CTF12-BC	BC05	C2	6.0	14.95	1640	1620	92.1	2200	319.000
CTM17-BC	BC20	C1	8.5	14.65	1420	1400	90.4	2800	406.000

Classification of the WC grain size

Average grain size [µm]	Classification	CERATIZIT code
< 0.2	nano	N
0.2 – < 0.5	ultrafine	U
0.5 – < 0.8	submicron	S
0.8 – < 1.3	fine	F
1.3 – < 2.5	medium	M
2.5 – < 6.0	coarse	C
> 6.0	extra-coarse	E

Core drill tips – METRIC


12083



Codification [mm]	L [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
9.0 x 4.5 x 3.0	9.0	±0.10	4.5	±0.05	3.0	-0.10

Codification code example: 12083- 9.0x4.5x3.0 CTM17-BC


12641



Codification [mm]	L [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
9.0 x 6.5 x 4.0	9.0	±0.10	6.5	±0.07	4.0	±0.05
10.0 x 6.5 x 4.0	10.0	±0.10	6.5	±0.07	4.0	±0.05

Codification code example: 12641- 9.0x6.5x4.0 CTM17-BC


13326



Codification [mm]	L [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
9.0 x 5.5 x 3.5	9.0	±0.10	5.5	-0.10	3.5	-0.10

Codification code example: 13326- 9.0x5.5x3.5 CTM17-BC

14420



Codification [mm]	L [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
10.0 x 5.0 x 3.5	10.0	±0.10	5.0	±0.10	3.5	±0.15


Codification code example: 14420- 10.0x5.0x3.5 CTM17-BC

Core drill tips – METRIC

14157



Codification [mm]	L [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
12.0 x 7.0 x 4.0	12.0	±0.10	7.0	+0.20	4.0	-0.10

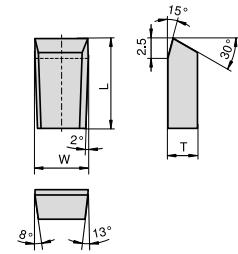


Codification code example: 14157- 12.0x7.0x4.0 CTF12-BC

23985



Codification [mm]	L [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
8.0 x 6.6 x 4.1	8.0	±0.10	6.6	±0.10	4.15	-0.15




Codification code example: 23985- 8.0x6.6x4.1 CTF12-BC

28537



Codification [mm]	L [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
12.5 x 7.2 x 4.1	12.5	±0.15	7.2	±0.20	4.1	-0.10




Codification code example: 28537- 12.5x7.2x4.1 CTF12-BC

30838




Codification [mm]	L [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
8.1 x 7.1 x 4.1	8.1	±0.10	7.1	±0.10	4.1	-0.10



Codification code example: 30838- 8.1x7.1x4.1 CTF12-BC

Core drill tips – METRIC


16623

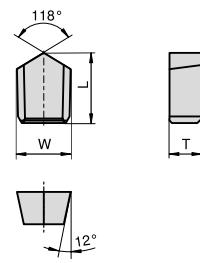

Codification [mm]	L [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
8.5 x 6.5 x 3.9	8.5	±0.10	6.25	±0.05	3.915	±0.035

Codification code example: 16623- 8.5x6.5x3.9 CTM17-BC


39241



Codification [mm]	L [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
8.0 x 4.0 x 3.0	8.0	±0.10	4.0	±0.10	3.0	±0.05
8.0 x 5.5 x 3.6	8.0	±0.10	5.5	±0.10	3.6	±0.05

Codification code example: 39241- 8.0x4.0x3.0 CTM17-BC


42067



Codification [mm]	L [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
10.3 x 5.0 x 3.0	10.3	±0.10	5.0	±0.10	3.0	±0.07

Codification code example: 42067- 10.3x5.0x3.0 CTM17-BC

50809

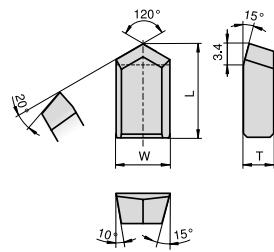

Codification [mm]	L [mm]	Tol. [mm]	W [mm]	Tol. [mm]	T [mm]	Tol. [mm]
8.0 x 7.2 x 4.0	8.0	±0.10	7.2	+0.20	4.1	-0.10
12.5 x 7.2 x 4.0	12.55	±0.15	7.2	+0.20	4.1	-0.10

Codification code example: 50809- 8.0x7.2x4.0 CTM17-BC

Hard Material Solutions

Hard cases are our speciality

We are your ideal partner when it comes to **high-quality hard materials for production processes, tool manufacturing and wear protection.**

From standard products to tailor-made solutions, from massive components to minute parts, from the blank to the fully finished product – a product that meets the highest standards of precision, surface treatment, and user-friendly assembly – our carbide solutions ensure improved efficiency and outstanding total cost of ownership.


This is the case in a variety of application fields and industrial sectors. Even when subjected to extreme stress, our cemented carbides are notable for the high flexibility they offer in numerous industries. Our products are specially designed for extreme working conditions, making our Hard Material Solutions impressive tools for optimising your processes and increasing wear resistance.

Product portfolio

- ▲ Blanks and semi-finished products
- ▲ Water-jet cutting
- ▲ Hob milling
- ▲ Drawing tools & drawing nibs

Solutions for:

- ▲ Tool & die
- ▲ Fastening industry
- ▲ Injection technology
- ▲ Health industry
- ▲ Plastics industry

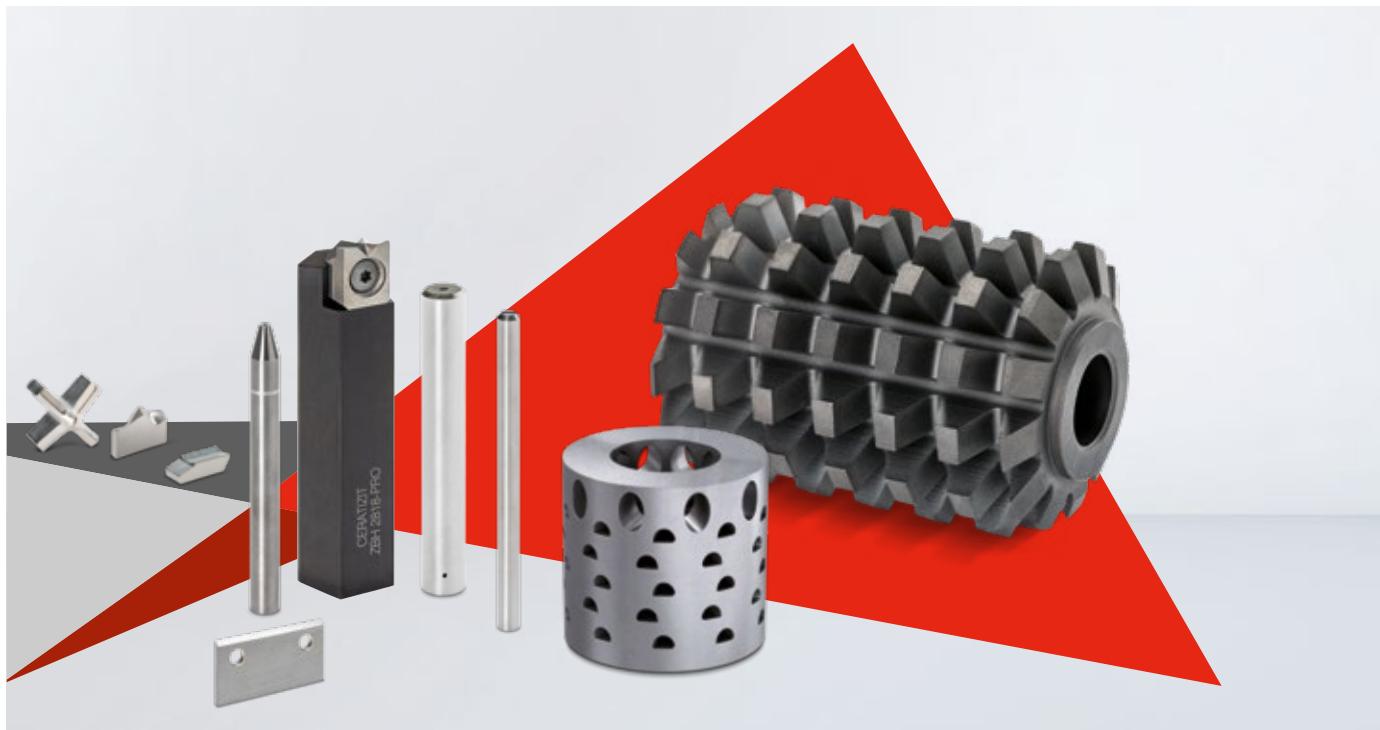

Index

1		5	
11384 – Metric	30	50210 – Metric	57
11400 – Metric	43	50809 – Metric	69
12083 – Metric	67	50850 – Ansi	29
12500 – Metric	47, 61	50850 – Metric	29
12641 – Metric	67	58000 – Metric	40
13326 – Metric	67	58800 – Metric	42
14157 – Metric	67		
14420 – Metric	67		
14444 – Metric	34	C	
14818 – Metric	61	CERATIZIT Style 58000	40
16000 – Metric	54	Core drill tips	68–69
16300 – Metric	50	CT4 – Ansi	25
16623 – Metric	69	CT4 – Japan	25
17353 – Metric	63	CT4 – Metric	24
17871 – Ansi	32	CTF12-BC	15, 22, 38, 66
17871 – Ansi Inch	31	CTM17-BC	15, 66
		CTS06-KC	15
2		G	
22000 – Ansi	49	Glass drill tips	62–63
22000 – Ansi Inch	48	Grades for stone working	15, 22, 38, 66
23500 – Metric	51		
23985 – Metric	68	H	
24323 – Metric	52	Hammer drill tips	20–35
26000 – Japan	33		
28500 – Ansi	55	I	
28500 – Ansi Inch	55	Innovation	16–19
28537 – Metric	68		
3		M	
30838 – Metric	68	Masonry drill tips	36–57
32222 – Metric	45	Metal cutting tips	60–61
37071 – Metric	46		
38500 – Metric	34	S	
38911 – Metric	34	Special Tips	58–63
39241 – Metric	69		
39742 – Metric	35		
4			
40429 – Metric	35		
42067 – Metric	73		
43500 – Metric	53		
46000 – Metric	26		
46600 – Ansi	27		
46716 – Metric	56		
46973 – Ansi	44		
47500 – Japan	28		

Headquarters

CERATIZIT S.A.
LU-8232 Mamer
T. +352 31 20 85-1
ceratizit.com

Sales site

CERATIZIT Hard Material Solutions S.à r.l.
LU-8232 Mamer
T. +352 31 20 85-1
[E. hardmaterialsolutions@ceratizit.com](mailto:hardmaterialsolutions@ceratizit.com)